

PRODUCT CHANGE NOTIFICATION

#PCN-TT-C89F-15

Business Unit	Product Line Code	Type of Change	Action	Date of issue
TT	CL1	Electrical	Notify Distributors and Field	1/12/2016

The following Phoenix Contact products have been modified. Existing specifications will be met or exceeded. Please review and acknowledge this document and inform your personnel as needed.

Description of Change:

Due to new revisions in the IEC 61643-11 standard, the technical data of the products have to be restated. This resulted in a change in the packing slip. Additionally, products are now required to be CE-certified. Tests were performed and documented by the development department.

The following changes in technical data has been documented:

- Short circuit current rating, (ISCCR):
For FLT 25-400, FLT 60-400 and FLT 35-260: down-rated from 25 kA to 2,5 kA
- TOV-behavior at UT (L-PEN):
For FLT 60-400: improved from 400 V (5s) to 440 V (5s)

Warranty Information:

N/A

Stock Status

Can existing stock still be used? Y

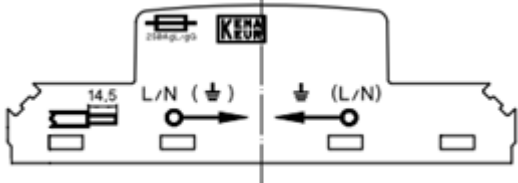
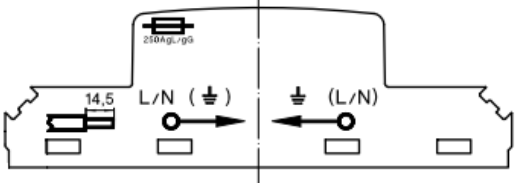
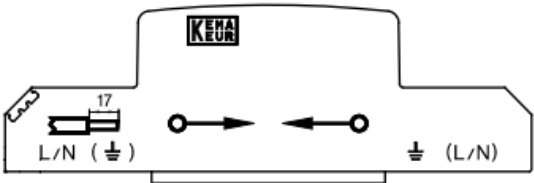
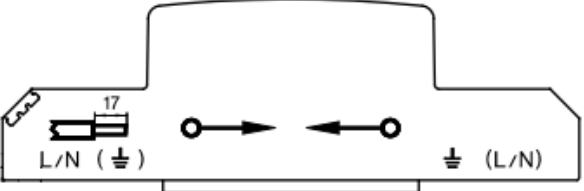
Is mixture of stock acceptable? N

Transaction Dates:

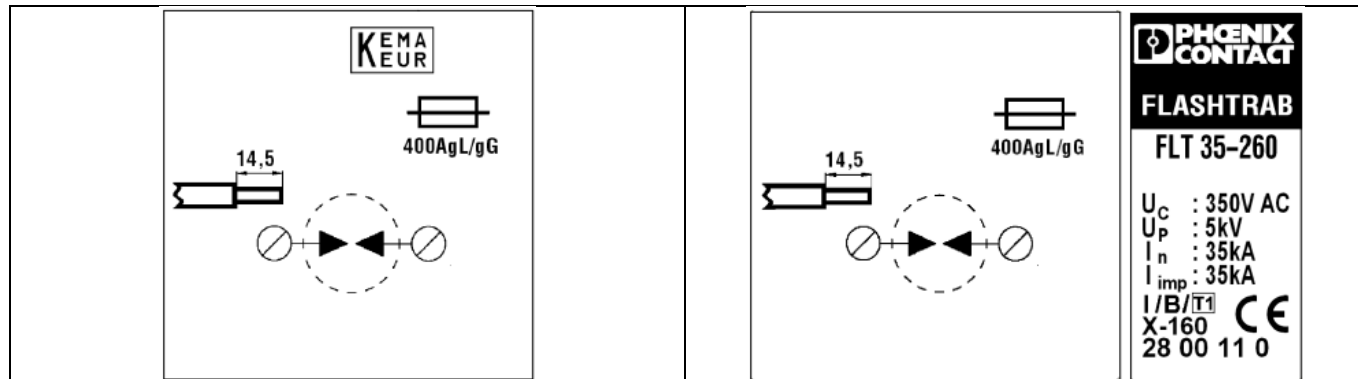
Date modification goes into effect from Germany: 6/16/2015

Expected first shipment (from Phoenix Contact) of the modified product(s): 7/1/2015

PRODUCT CHANGE NOTIFICATION

Previous Product	New Product
 <p>PHOENIX CONTACT FLASHTRAB FLT 25-400 U_C : 440 V AC I_{imp} : 25 kA U_p < 5,0 kV I/B/T1 X-064 28 00 10 6</p>	 <p>PHOENIX CONTACT FLASHTRAB FLT 25-400 U_C : 440V AC U_p : 5kV I_n : 25kA I_{imp} : 25kA I/B/T1 X-159 CE 28 00 10 6</p>
 <p>PHOENIX CONTACT FLASHTRAB FLT 60-400 U_C : 400 V AC U_p < 5 kV I_{imp} : 60 kA I_n : 60 kA 500A gL/gG IP 20 KEMA KEUR</p> <p>I/B/T1 X-174 CE 28 00 10 7</p>	 <p>PHOENIX CONTACT FLASHTRAB FLT 60-400 U_C : 400 V AC U_p < 5 kV I_{imp} : 60 kA I_n : 60 kA 500A gL/gG IP 20</p> <p>I/B/T1 X-174 CE 28 00 10 7</p>

PRODUCT CHANGE NOTIFICATION



Should you have any issues with the timeline or content of this change, please contact Phoenix Contact using the contact information below. Customers should acknowledge receipt of the PCN within 30 days of delivery of the PCN; provided, however that the failure to acknowledge receipt does not affect the product change or the effective date thereof.

Contact Info:

Jack Coghlan
 jcoghlan@phoenixcon.com
 (717) 944-1300 x3531

Thank you,



Surge and Overcurrent Protection, Product Marketing Manager

Part#	Type Description
2800106	FLT 25-400
2800107	FLT 60-400
2800110	FLT 35-260