


9D SERIES
High Current Terminal Blocks

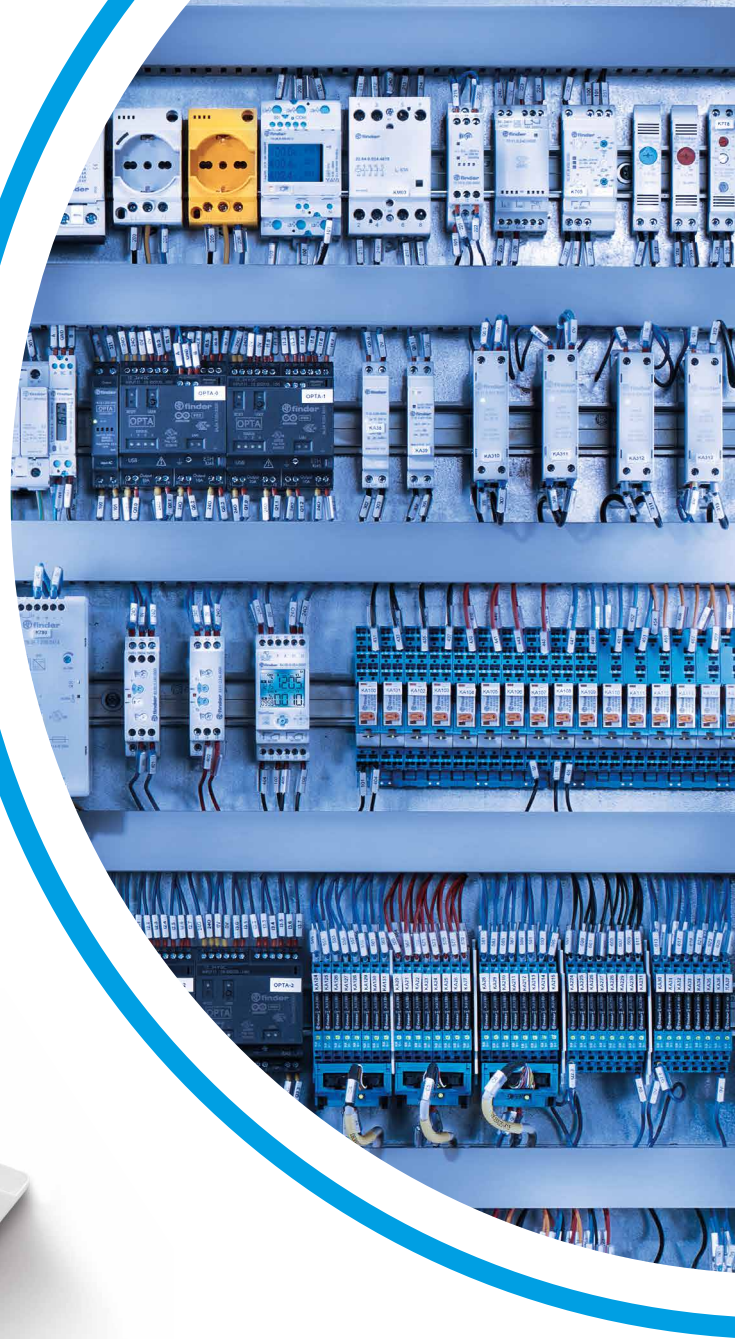

High Current Terminal Blocks
9D Series

For the combining and distribution of high current power cables within electrical panels and cabinets.

3 configurations available in a single product:

- Single, pole splitter: Split of main power input into 4, 6, 10 or 11 outputs
- Multiple, pole splitters: Splitting with increased number of outputs
- Grouping: Combining several inputs to make a single output (eg. solar applications)
- Nominal current: 80, 125, 175, 250 or 400 A
- Available with 7, 8 or 12 connections (according to type)
- Cable connection capacity up to 185 mm² cross section
- Screw terminals
- 35 mm rail (EN 60715) mount



High Current Terminal Blocks 9D Series

- Reversible snap-on cover
- For use with Cu + AL cables
- Ratings, approvals and screw torque settings marked on cover
- Plastic material conforming to UL94 V0
- Ready to use Marking Kit (L1, L2, L3, N, PE, +, -) supplied with every block

		9D.01.5.080.0304	9D.01.5.125.0206	9D.01.5.175.0210	9D.01.5.250.0111	9D.01.5.400.0111					
		• 80 A • 7 connections	• 125 A • 8 connections	• 175 A • 12 connections	• 250 A • 12 connections	• 400 A • 12 connections					
INPUT WIRE SPECIFICATION (Solid/Stranded)											
Number of input		3	1	2	1	1					
Terminal diameter	Ømm	6.6	9.8	11.8	15.3	15.3					
Min. wire size	mm ²	2.5	10	10	35	95					
	AWG	14	8	6	2	3/0					
Max. wire size	mm ²	16	35	70	120	185					
	AWG	6	2	2/0	250 Kcmil	400 Kcmil					
Wire input stripping length	mm	15	15	15	28	28					
Tool		Posidriv - flat screwdriver	Allen Key	Allen Key	Allen Key	Allen Key					
Tool dimension	mm	5.5/PZ2	4	5	6	8					
Torque	Nm	1.5...2	3.5...5	6...10	19...21	25					
OUTPUT WIRE SPECIFICATION (Solid/Stranded)											
Number of output		4	1	6	10	2	5	4	2	5	4
Terminal diameter	Ømm	4.5	6.8	6.4	6.4	8.7	6.4	5.7	8.7	6.4	5.7
Min. wire size	mm ²	2.5	6	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	AWG	14	10	14	14	14	14	14	14	14	14
Max. wire size	mm ²	6	16	16	16	35	16	10	35	16	10
	AWG	10	6	6	6	2	6	8	2	6	8
Wire input stripping length	mm	11	11	11	11	11	11	11	11	11	11
Tool		Posidriv - flat screwdriver	Allen Key	Posidriv-flat screwdriver	Posidriv - flat screwdriver	Allen Key	Allen Key	Allen Key	Allen Key	Allen Key	Allen Key
Tool dimension	mm	4/PZ1	3	5.5 PZ2	5.5/PZ2	4	3	3	4	3	3
Torque	Nm	0.8...12	2...3	2...3	2...3	3.5...5	2...3	2...3	3.5...5	2...3	2...3

Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice. FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document. In case of discrepancies between the printed and online versions, the latter prevails.