


BATTERY STUDS

POWER DISTRIBUTION ACCESSORIES



46210-10

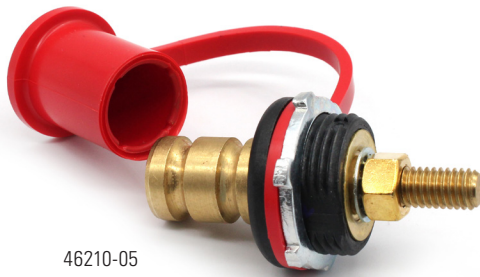

46210-05

Description

Use to make easily-accessible battery connections, inside or outside the vehicle. They can be used individually or in pairs and are easy to install. Jumper terminals have contact post 13/16" (20.6mm) diameter, 1 1/8" (28.8mm) long, which is grooved to accept standard jumper cables 6 -48V DC.

Features and Benefits

- Color-coordinated to serve as easy-to-identify power points
- Easy to install for quick distribution of power
- Brass core ensures high conductivity
- Impact-resistant plastic bodies

Ordering Information

Ordering Information can be found on Page 2.

Specifications

| | |
|--------------------------------|----------------|
| Insulator Material: | Plastic PBT |
| Operating Temp Range: | -40°C TO 105°C |
| Max Continuous Current: | 285 |
| Max Continuous Voltage: | 36V |
| Mounting Torque: | 10.8-13.5 Nm |
| Stud Material: | Brass |
| Washer Material: | Brass |

Applications

- Provide heavy-duty ground or power points of connections in vehicle circuits
- Bring power through bulkheads or other barriers between power and access points

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/Batterystuds

BATTERY STUDS

POWER DISTRIBUTION ACCESSORIES

Ordering Information

| PART NUMBERS | DESCRIPTION | PACKAGING | MAXIMUM CURRENT | BODY BY COLOR | STUD THREAD SIZE | CAP TYPE | Flat Washer Material | Split Lockwasher Material | Lockwasher Material |
|--------------|--------------------------------------|-----------|----------------------|---------------|------------------|-----------|----------------------|---------------------------|---------------------|
| 46210 | Battery Jumper Stud, Positive | Bulk | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46210-01 | Battery Jumper Stud, Positive | Bulk | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | Red Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46210-02 | Battery Jumper Stud, Positive | Bulk | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | Red Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-02-BX | Battery Jumper Stud, Positive, Boxed | Box | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | Red Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-03 | Battery Jumper Stud, Negative | Bulk | 6-36 VDC 285 AMPS | Black | 3/8 - 16 | Black Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-03-BX | Battery Jumper Stud, Negative, Boxed | Box | 6-36 VDC 285 AMPS | Black | 3/8 - 16 | Black Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-04 | Battery Jumper Stud, Negative | Bulk | 6-36 VDC 285 AMPS | Black | 3/8 - 16 | Black Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46210-05 | Battery Jumper Stud, Positive | Bulk | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | Red Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-08 | Battery Jumper Stud, Negative | Bulk | 6-36 VDC 285 AMPS | Black | 3/8 - 16 | Black Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-09 | Battery Jumper Stud, Positive | Bulk | 6-36 VDC 285 AMPS | Red | 3/8 - 16 | Red Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46210-10 | Battery Jumper Stud, Negative | Bulk | 6-36 VDC 285 AMPS | Black | 3/8 - 16 | Black Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-01 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-01-BX | Feed Thru Stud, Negative, Boxed | Box | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-02 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 250 AMPS | Black | ½ - 20 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-03 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 250 AMPS | Black | ½ - 20 | No Cap | Brass | Zinc Plated Steel | No Lockwasher |
| 46211-04 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Bronze |
| 46211-06 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46211-11 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46211-12 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | M10 X 1.5 | No Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46211-13 | Feed Thru Stud, Positive | Bulk | 6-36 VDC 260 AMPS | Red | M10 X 1.5 | No Cap | No Flat Washer | No Split Lockwasher | No Lockwasher |
| 46211-14 | Feed Thru Stud, Negative | Bulk | 6-36 VDC 260 AMPS | Black | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-R | Feed Thru Stud, Positive | Bulk | 6-36 VDC 260 AMPS | Red | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 46211-R-BX | Feed Thru Stud, Positive, Boxed | Box | 6-36 VDC 260 AMPS | Red | 3/8 - 16 | No Cap | No Flat Washer | No Split Lockwasher | Zinc Plated Steel |
| 97846-A | Replacement Cap, Positive | Bulk | - | Red | - | - | - | - | - |
| 97846-A-BX | Replacement Cap, Positive, Boxed | Box | - | Red | - | - | - | - | - |
| 97846-B | Replacement Cap, Negative | Bulk | - | Black | - | - | - | - | - |
| 97846-B-BX | Replacement Cap, Negative, Boxed | Box | - | Black | - | - | - | - | - |