

1376164-1 ✓ ACTIVE

TE Internal #: 1376164-1


Battery Holders, ML621, 2 Position, Horizontal, Gold, Signal, -40 -

185 °F [-40 - 85 °C]

[View on TE.com >](#)



Connectors > PCB Connectors > Battery Connectors & Holders > Battery Holders

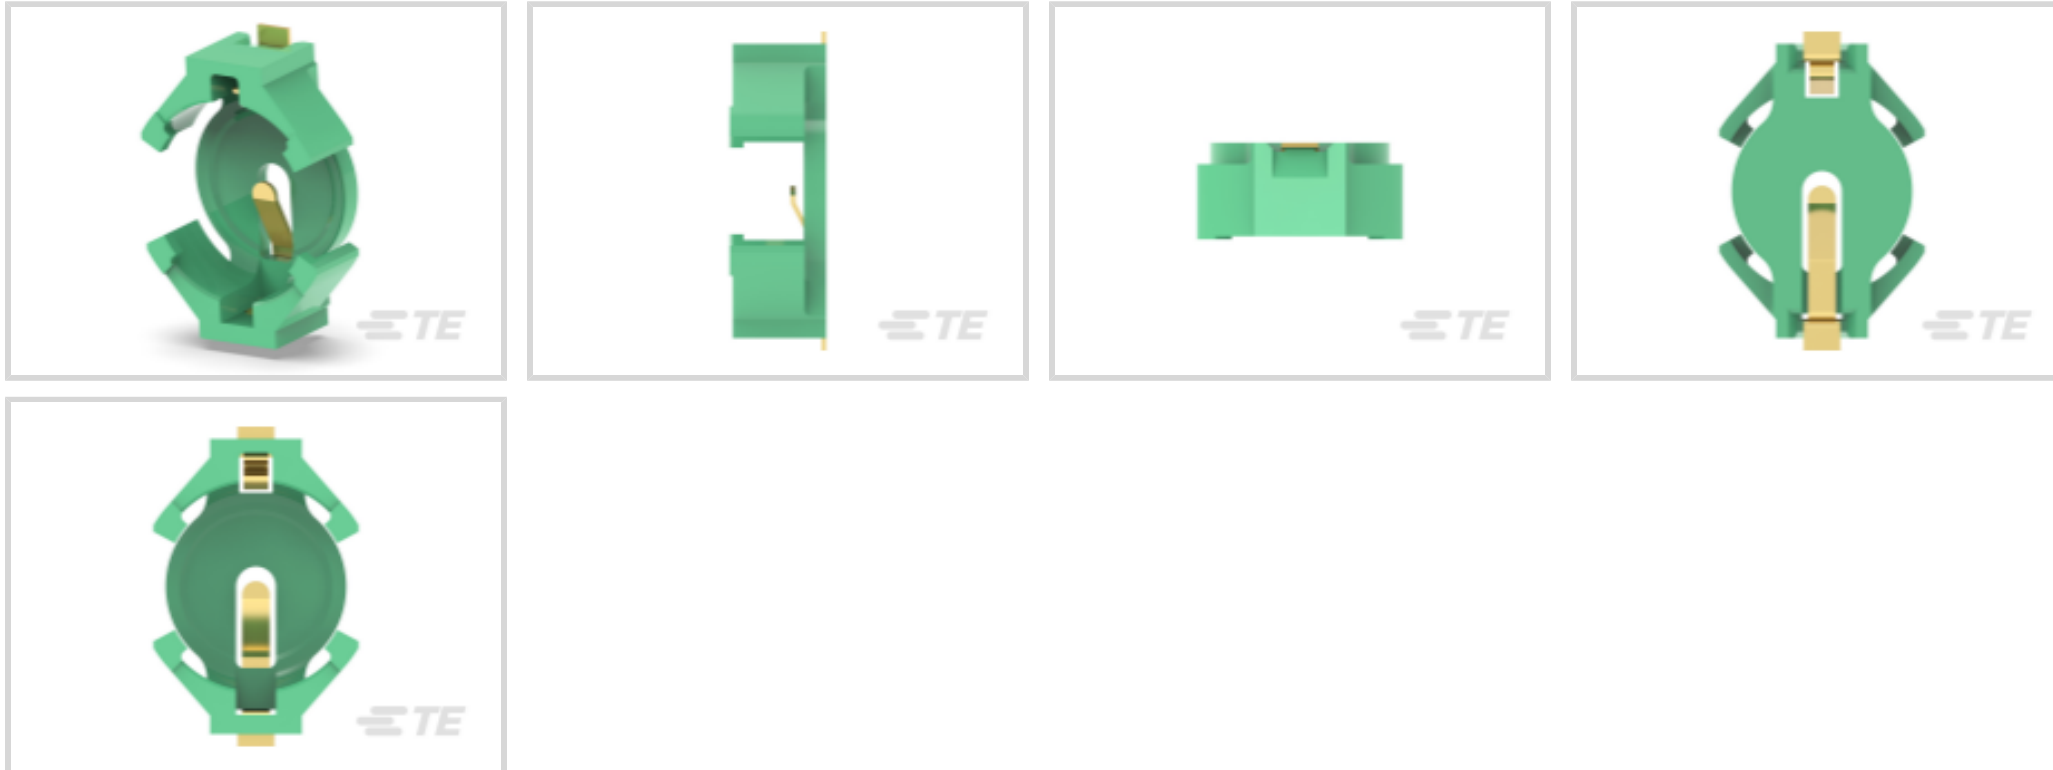

Battery Compatibility: **ML621**

Number of Positions: **2**

PCB Mount Orientation: **Horizontal**

Contact Mating Area Plating Material: **Gold**

PCB Mount Alignment: **Without**

Features

Product Type Features

Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	2
PCB Mount Orientation	Horizontal

Body Features

Battery Holder Type	Coin Cell
Battery Weight	.09 g
Primary Product Color	Green
Battery Compatibility	ML621

Contact Features

Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Gold

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

PCB Mount Alignment	Without
---------------------	---------

Dimensions

Compatible Battery Dimensions	6.8 x 2.1 mm [.268 x .083 in]
-------------------------------	-------------------------------

Usage Conditions

Operating Temperature Range	-40 - 85 °C [-40 - 185 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Quantity	2000
--------------------	------

Packaging Method	Tape & Reel
------------------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	---

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Reflow solder capable to 245°C
---------------------------	--------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

Product Drawings

BATTERY HOLDER ML621 ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1376164-1_C.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1376164-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1376164-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

[Battery Holder](#)

English