




**SPECIFICATION SHEET**

<b>SPECIFICATION SHEET NO.</b>	Q1211-FB455K0000L113	
<b>DATE</b>	Dec. 11, 2023	
<b>REVISION</b>	A0	Updated With Most Recent Data - Official First Release
<b>DESCRIPTION AND MAIN PARAMETRICS</b>	<p>KHz Dip Ceramic Filter L11.0*W7.0*H8.0mm 5 Pins CF W Series            455±1.0 KHz, 6dB Bandwidth: ±10.0KHz Min.; Ripple: 1.0dB Max.            GDT Ripple deviation @f0±7KHz: 30µsec Max            Insertion Loss: 7.0dB Max.; Input/Output Impedance:1.5 Kohm,            Operating Temp. Range -20°C ~+85°C, Packed in Bulk            RoHS/RoHS III compliant, RoHS Annex III lead Exemption            (exempt per RoHS EU 2015/863)</p>	
<b>CUSTOMER</b>		
<b>CUSTOMER PART NO.</b>		
<b>CROSS REF. PART NO.</b>		
<b>ORIGINAL MFG/PART NO.</b>	TGS/CF 455KDW BLH/LTW455KDx	
<b>PART CODE</b>	FB455K0000L113	

<b>VENDOR APPROVE</b>			
Issued/Checked/Approved			
DATE: Dec. 11, 2023			

<b>CUSTOMER APPROVE</b>	
DATE:	
12/11/2023	

## KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES

### MAIN FEATURE

- KHz Dip Ceramic Filter GDT Type CF W Series
- Case Dimension L11.0\*W7.0\*H8.0mm, 5 Pins
- GDT Ripple Deviation.
- Low Cost And Short Shipment
- Cross More Competitors Part CFWL Series
- RoHS/RoHS III compliant, RoHS Annex III lead Exemption (exempt per RoHS EU 2015/863)



### APPLICATION

- Communication Electronics

### PART CODE GUIDE

**RFQ**

[Request For Quotation](#)

FB	455K0000	L	113
1	2	3	4

1. FB: Part family Code for KHz Dip Ceramic Filter L11.0\*W7.0\*H8.0mm 5 Pins CF W Series
2. 455K0000: Frequency range code for 455.0000KHz
3. L: Dip type, Package in bulk
4. 113: Internal Control Code or Special Parameters Code Letter A~Z or digits (1-9)


### HOW TO ORDER

Please follow up **Part Code Guide** and indicate pat code when you order or RFQ.


**KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES**

**DIMENSION** (Unit: mm)

Image for reference

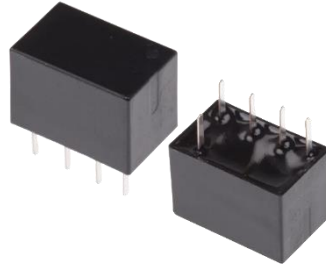


**Top View**

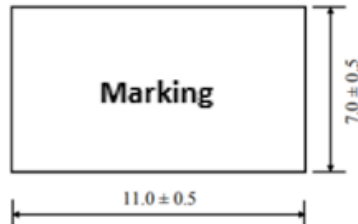

**Marking**

Line 1: Series Code  
Line 2: Frequency Range  
+ Internal Code


**Bottom View**

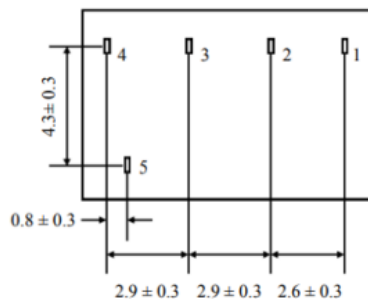

**Connection**

Pin 1: Input  
Pin 2, Pin 3, Pin 4: Ground  
Pin 5: Output

**Side View**




## KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES

### GENERAL ELECTRICAL PARAMETERS

PARAMETER	UNITS	VALUE			CONDITION
		MIN.	TYPICAL	MAX.	
Operation Temperature	°C	-20		+85	
Storage Temperature	°C	-40		+85	
Temperature Stability	%			±0.5	@ -20°C ~+85°C
Stop Band Attenuation	dB	40			@f0±100KHz
Ripple	dB			1.0	@f0 ±3KHz~10KHz
Spurious Response	dB	20			@0.1~1.0MHz
Insulation Resistance	MΩ	100			@DC 25V 1 minute
RoHS Status	RoHS/RoHS III compliant, RoHS Annex III lead Exemption (exempt per RoHS EU 2015/863)				

### MEASURING CIRCUIT

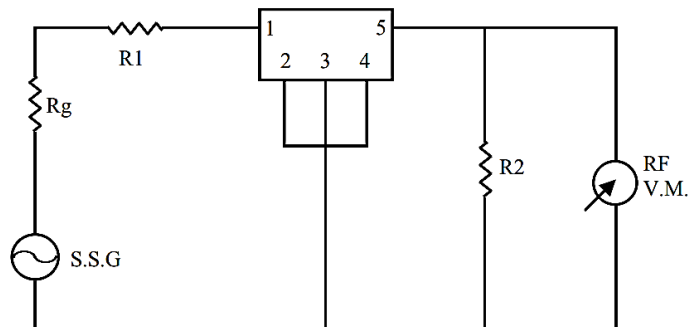

$$R_g + R_1 = R_2 = \text{Input/Output Impedance}$$

**KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES**
**MAIN ELECTRICAL PARAMETERS - Ta = 25°C**

Part Code	Center Freq. (KHz)	Min. Bandwidth			Max. Insertion Loss @Min. loss point	Max. GDT Ripple Deviation	Input/Output Impedance
		@3 dB	@6 dB	@50 dB			
		(KHz)					
FB450K0000L111	450±1.5	±12.0	±15.0	±30.0	5.0	30 @f0±10KHz	1.5
FB450K0000L112	450±1.5	±10.0	±12.5	±27.5	6.0	30 @f0±10KHz	1.5
FB450K0000L113	450±1.0	±8.0	±10.0	±25.0	7.0	30 @f0±7KHz	1.5
FB450K0000L114	450±1.0	±5.0	±7.50	±20.0	8.0	30 @f0±5.0KHz	1.5
FB450K0000L115	450±1.0	±4.5	±6.0	±17.5	8.0	40 @f0±4.5KHz	2.0
FB450K0000L116	450±1.0	±3.0	±4.5	±15.0	9.0	40 @f0±3.0KHz	2.0
FB455K0000L111	455±1.5	±12.0	±15.0	±30.0	5.0	30 @f0±10KHz	1.5
FB455K0000L112	455±1.5	±10.0	±12.5	±27.5	6.0	30 @f0±10KHz	1.5
FB455K0000L113	455±1.0	±8.0	±10.0	±25.0	7.0	30 @f0±7KHz	1.5
FB455K0000L114	455±1.0	±5.0	±7.50	±20.0	8.0	30 @f0±5.0KHz	1.5
FB455K0000L115	455±1.0	±4.5	±6.0	±17.5	8.0	40 @f0±4.5KHz	2.0
FB455K0000L116	455±1.0	±3.0	±4.5	±15.0	9.0	40 @f0±3.0KHz	2.0

**Note**

- Center Frequency f0 is @Center of 6dB Bandwidth.
- Specification is subject to changed without notice, please contact us for any update
- The Parameters in the above table are all general specifications. If you need other Parameters, please contact us.

**KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES**

**MEASUREMENT**

- Measurement Condition: Measurement shall be carried out at the standard temperature of 25±2°C. If no specific requirements, Test can be carried out under 5-35°C.

**PHYSICAL CHARACTERISTICS**

Test Items	Measurement Condition	Requirement
Random Drop	Filter shall be measured after 3 times random drops from the height of 30cm on concrete floor	No visible damage and it meet Table 1
Vibration	Filter shall be measured after being applied vibration of amplitude of 1.5mm with 10-55Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours	No damage and it meet Table 1.
Solderability	Lead terminals are immersed in aide solder for 5 sec and then immersed in soldering bath of 230±5°C, for 3±0.5 sec.	At least 95% lead terminals shall be covered with solder.
Terminal strength Pulling	After force of 1kg for 10 seconds is applied to each terminal in axial direction, Filter shall be measured.	No damage, no cut-off and it meet Table 1.
Bending	After lead terminals shall be fixed at 2mm from filter’s body, they shall be folded up to 90°from their axial directions and folded back to -90°.Then folded back to their axial direction, the speed of folding be each 3 seconds.	No damage, no cut-off and it meet Table 1

**KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES**

**ENVIRONMENTAL CHARACTERISTICS**

Test Items	Measurement condition	Requirement
Humidity	After being placed in a chamber with 90-95% R.H. at 40±2°C for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Resistance to Solder Heat	After being placed in a chamber with 80±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
High Temperature	After being placed in a chamber with 80±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Low Temperature	After being placed in a chamber with -20±2°C, for 100 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall meet Table 1.
Heat Shock	After being kept at room temperature, filter shall be placed at temperature of -55 °C, for 30 minutes, then be placed at temperature. 85°C, for 30 minutes. After that returned to -55°C again. Repeated above cycle for 5 times. After being kept in room temp. for 1 hour, filter shall be measured	It shall meet Table 1.

*Table1*

Item	Center Frequency	Band width (6dB)	Band width (50dB)	Stop Band Attenuation (fo±100KHz)	Ripple (fo±7KHz)	Insertion Loss
Specification	455±1.0KHz Max.	±10.0KHz Min.	±25.0KHz Min.	40dB Min.	1.0dB Max	7.0dB Max

## KHZ DIP CERAMIC FILTER GDT TYPE CF W SERIES

### IMPORTANT NOTES AND DISCLAIMER

1. RoHS Compliance: The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. REACH Compliance: REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does NextGen assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.