


M12 A-coding (Sensor and Actuator)




M12 A-coding Straight Connector, Molded Cable

Male

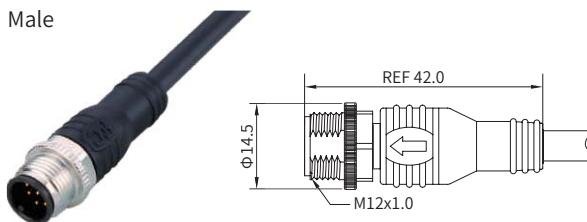

Female

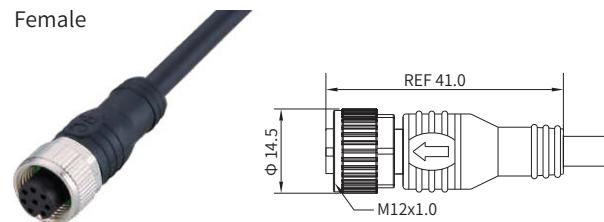

■ Specifications

Contacts	3	4	5	8	12	17
Certification						
Pin layout(Male)						
Pin layout(Female)						
Standard	IEC 61076-2-101					
Ambient temperature	-25°C ~ +85°C (flexible installation) , -40°C ~ +85°C (fixed installation)					
Connector insert	TPU					
Connector contacts	Brass with gold plated					
Connector overmold	TPU					
Coupling nut/screw	Zinc alloy with nickel plated					
Seal/O-ring(of Female)	FKM					
Insulation resistance	≥100MΩ					
Contact resistance	≤5mΩ					
Shielding	Unavailable					
IP rating	IP67, IP68, IP69K in locked condition					
Mating endurance	>500 cycles					
Rated current	4 A			2A		1.5A
Rated voltage	250V AC/DC		60V AC/DC	30V AC/DC		30V AC/DC
Wire gauge	0.34mm²(AWG22)			0.25mm²(AWG24)		0.14mm²(AWG26)

■ Part Number

*17 pin with different overmold from above other pins.

Pins	Cable length	Male		Female	
		PVC	PUR	PVC	PUR
3	1m	MA12MAHD03ST-10CB34	MA12MAHD03ST-10RB34	MA12FAHD03ST-10CB34	MA12FAHD03ST-10RB34
	3m	MA12MAHD03ST-30CB34	MA12MAHD03ST-30RB34	MA12FAHD03ST-30CB34	MA12FAHD03ST-30RB34
	5m	MA12MAHD03ST-50CB34	MA12MAHD03ST-50RB34	MA12FAHD03ST-50CB34	MA12FAHD03ST-50RB34
4	1m	MA12MAHD04ST-10CB34	MA12MAHD04ST-10RB34	MA12FAHD04ST-10CB34	MA12FAHD04ST-10RB34
	3m	MA12MAHD04ST-30CB34	MA12MAHD04ST-30RB34	MA12FAHD04ST-30CB34	MA12FAHD04ST-30RB34
	5m	MA12MAHD04ST-50CB34	MA12MAHD04ST-50RB34	MA12FAHD04ST-50CB34	MA12FAHD04ST-50RB34
5	1m	MA12MAHD05ST-10CB34	MA12MAHD05ST-10RB34	MA12FAHD05ST-10CB34	MA12FAHD05ST-10RB34
	3m	MA12MAHD05ST-30CB34	MA12MAHD05ST-30RB34	MA12FAHD05ST-30CB34	MA12FAHD05ST-30RB34
	5m	MA12MAHD05ST-50CB34	MA12MAHD05ST-50RB34	MA12FAHD05ST-50CB34	MA12FAHD05ST-50RB34
8	1m	MA12MAHD08ST-10CB25	MA12MAHD08ST-10RB25	MA12FAHD08ST-10CB25	MA12FAHD08ST-10RB25
	3m	MA12MAHD08ST-30CB25	MA12MAHD08ST-30RB25	MA12FAHD08ST-30CB25	MA12FAHD08ST-30RB25
	5m	MA12MAHD08ST-50CB25	MA12MAHD08ST-50RB25	MA12FAHD08ST-50CB25	MA12FAHD08ST-50RB25
12	1m	MA12MAHD12ST-10CB14	MA12MAHD12ST-10RB14	MA12FAHD12ST-10CB14	MA12FAHD12ST-10RB14
	3m	MA12MAHD12ST-30CB14	MA12MAHD12ST-30RB14	MA12FAHD12ST-30CB14	MA12FAHD12ST-30RB14
	5m	MA12MAHD12ST-50CB14	MA12MAHD12ST-50RB14	MA12FAHD12ST-50CB14	MA12FAHD12ST-50RB14
17	1m	MA12MAHD17ST-10CB14	MA12MAHD17ST-10RB14	MA12FAHD17ST-10CB14	MA12FAHD17ST-10RB14
	3m	MA12MAHD17ST-30CB14	MA12MAHD17ST-30RB14	MA12FAHD17ST-30CB14	MA12FAHD17ST-30RB14
	5m	MA12MAHD17ST-50CB14	MA12MAHD17ST-50RB14	MA12FAHD17ST-50CB14	MA12FAHD17ST-50RB14

■ Default wire colors

Pin No.												
Pin 1	BN	BN	BN	WH	WH	PK	PK	BU	BU	OR	BK	BN, WH/GN
Pin 2		WH	WH	BN	BN	BU	BU	BN/GN	BN/GN	RD	BK	14. BN/GN
Pin 3	BU	BU	BU	GN	GN	BU	BU	GN	GN	RD	GY	15. WH/YE
Pin 4	BK	BK	BK	YE	YE	BU	BU	YE	YE	OR	PK	16. YE/BN
Pin 5				GY	GY	PK	PK	GY	GY	RD	PK	17. WH/GY
Pin 6												YE
Pin 7												BK
Pin 8												GY
Pin 9												RD
Pin 10												VT
Pin 11												BK
Pin 12												GY/PK