
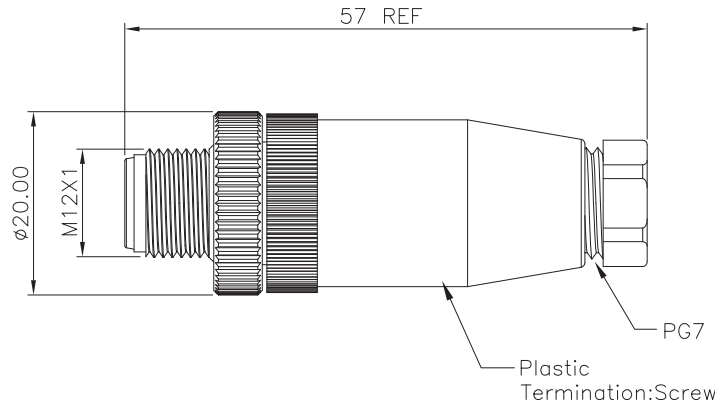



RoHS Compliant




Specifications:


Current Rating:4A
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Operating Temperature Range:-25°C ~ +85°C
 Material and Finish
 Insulator:Nylon (UL94V-0)
 Contact:Brass,Gold Plated
 Coupling Screw:Brass,Nickel Plated
 Outer Shell:Nylon Black
 Mechanical Performance
 Waterproof Rate:IP67
 Application Cable OD:4~6mm

How to Order


M12-XXP-A-AE4

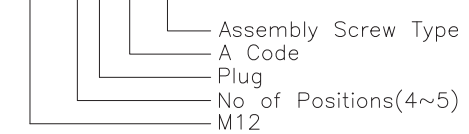

Pin Assignments Front View



4Pin



5Pin

F				DRAWN: Joy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.25	 ON-SHORE TECHNOLOGY, INC.
E						
D				CHECKED: Andrew	UNIT: MM	DESCRIPTION: M12 PLUG A CODE STRAIGHT ASSEMBLY SCREW TYPE
C					SCALE: 1:1	
B				APPROVAL: Bill He	SHEET: 1/1	PART NO: M12-XXP-A-AE4
A	14-Feb-2020		Joy Liu		PROJECTION:	
REV	DATE	FILE	BY			