


TABLE 1		INSERTION LOSS (MAX dB) 40GHz	VSWR DC ~ 40GHz
MODEL NUMBER	LENGTH		
415-0544-006	6.00 +.157/-0	-2.6	1.4
415-0544-012	12.00 +.196/-0	-3.8	1.4
415-0544-018	18.00 +.314/-0	-5.1	1.4
415-0544-024	24.00 +.393/-0	-6.6	1.4
415-0544-036	36.00 +.590/-0	-9.3	1.4

REV	ECO	DATE
1	INITIAL RELEASE	02-01-2023

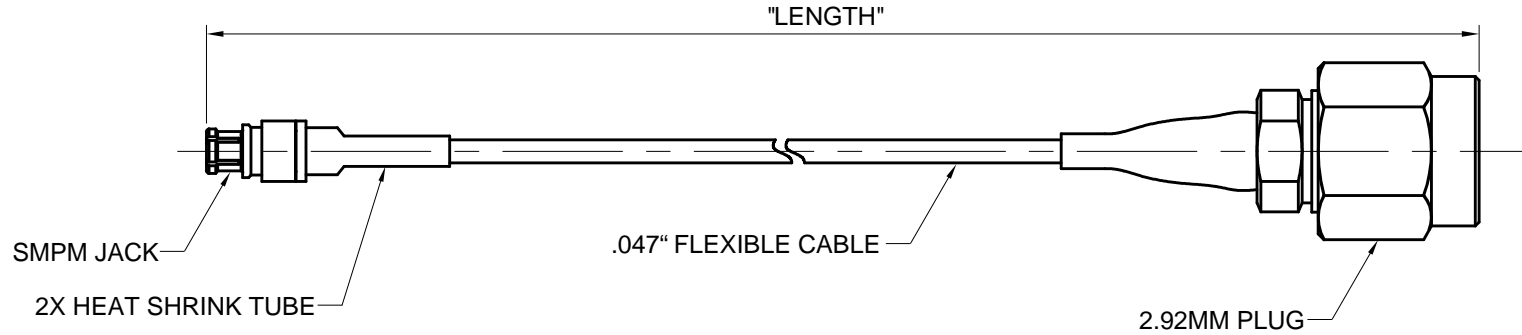

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
 - CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</p>	Model No: 415-0544-001/999	JOHNSON		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code 34078	Title: CABLE ASSY, STR SMPM JACK TO STR 2.92MM PLUG, .047" FLEXIBLE CABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION 	Drawing No. 415-0544-001/999	REV. 1
	Drawn by: TOMMY REN	Date: 02-01-2023	Size A	DO NOT SCALE DRAWING Workmanship Std. Sheet NONE 1 OF 1