2%6ȣ	2%')/.	$%3#2)04)/.	$!4%	"9
!		02%,)-).!29 2%,%!3%$	20ȣFebȣςπ	4ÅÎÎÙ

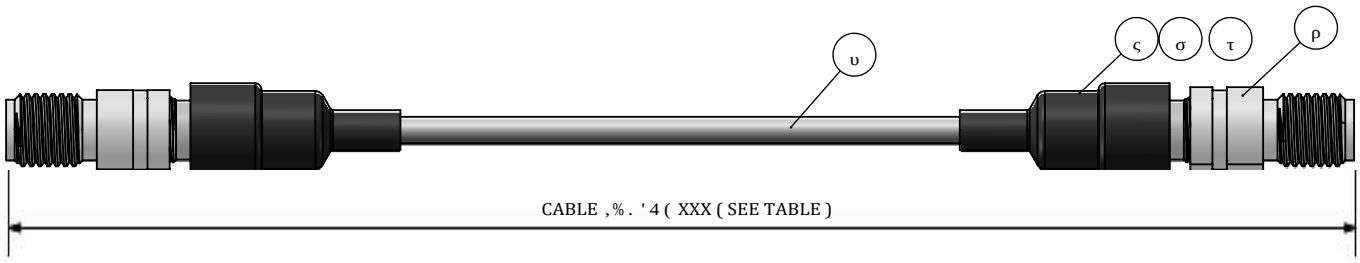

PART NUMBER	LENGTH INCHES	+/- LENGTH	LENGTH cm	MAX VSWR UP TO 40 GHz	MAX INSERTION LOSS [dB] UP TO 40 GHz
TM7SM9FS9FS000 015	6	0.25	15	1.35:1	1.08
TM7SM9FS9FS000 020	8	0.25	20	1.35:1	1.32
TM7SM9FS9FS000 031	12	0.25	31	1.35:1	1.79
TM7SM9FS9FS000 046	18	0.25	46	1.35:1	2.50
TM7SM9FS9FS000 061	24	0.25	61	1.35:1	3.21
TM7SM9FS9FS000 076	30	0.25	76	1.35:1	3.92
TM7SM9FS9FS000 091	36	0.25	91	1.35:1	4.63
TM7SM9FS9FS000 100	39	0.25	100	1.35:1	5.03
TM7SM9FS9FS000 122	48	0.25	122	1.35:1	6.04

MAXIMUM SPECIFICATIONS ARE PRODUCT MAXIMUM INCLUDING MEASURING SYSTEM UNCERTAINTY.
NOTE: PRODUCT SPECIFICATIONS ARE VERIFIED AT 73 DEG. F, SEA LEVEL AND 20 TO 80% RELATIVE HUMIDITY.

ASSEMBLIES ELECTRICAL & MECHANICAL SPECIFICATIONS		
IMPEDANCE, NOMINAL:	50	OHMS
CABLE JACKET DIAMETER:	0.092	INCHES
TEMPERATURE RANGE:	-50 to +105	DEGREES C
MATING TORQUE:	7-10	INCH POUNDS

RoHS Compliant

υ	5&ζχχζπχψζπφχζπςπ	πȣπχψє,/7,/33#/!8 2!7 #!",%	ζζζζζ	ρ
τ	-ςσπυσƬυζσπυζπ	2#ζ45"'ȟ(43+ȟσƬρφȟ",+	ζζζζζ	ς
σ	-ςσπυσƬυζσπτζπ	2#ζ45"'ȟ(43+ȟ'0/ȟρƬψȟ",	ζζζζζ	ς
ς	!45-ζψƬςζπ	45"'ȟ(43+ȟ)$Èπȣσρυȣȟ!$(36ȟ",+ȟ	ζζζζζ	ς
ρ	4-χ3ζω&3ζππ	ςȣως Í Í &%-!,%#/..ȣ/.πχψ#!",%	ζζζζζ	ς
)4%-	0!24.5-"%2	$%3#2)04)/.	-!4%2)!,	149

NOTE(S):
ρȣ3/,$%2 0%2)0#*ζ34$ζππρȟ53).',%!$&2%%3/,$%2ȣ
ςȣCABLE LENGTH TOLERANCE REFER TO ISO2768-V,
AND TOLERANCE VALUE MULTIPIED BY 2.

ISO2768-V (mm)					
6~30	30-120	120~400	400~1K	1K~2K	>2K
±1	±1.5	±2.5	±4	±6	±8

☆ +%9 $)-%.3)/.
.%%$ ρππÞ).30%#4)/.
ȷ88ȣ 2%&ȣ $)-%.3)/.
&/2 2%&ȣ/.,9

$2!7.ȣ 4ÅÎÎÙ
#(%#+%$ȣ
!002/6%$ȣ

).&/2-!4)/.#/.4!).%$/.4()3$2!7).')3#/.&)$%.4)!,!.$
-!9!,3/#/.4!). 02/02)%4!29#!2,)3,%Ƭ#534/-%2).&/2-!4)/.ȣ
$2!7).'#/.4%.4)3/.,9).4%.$%$&/2 53%/&4(%!"/6%
#534/-%2)&9/5!2%./4 4(%).4%.$%$ 2%#)0)%.4/2!54(/2):%$
%-0,/9%%/&!"/6%#/-0!.9.!-%ȟ9/5!2% (%2%"9./4)&)%$
!.9 53%ȟ$50,)#!4)/.ȟ2%#/.3425#4)/.ȟ/2$)342)"54)/./&
$2!7).').&/2-!4)/.)3342)#4,9 02/()")44%$ȣ

CARLISLE
).4%2#/..%#4 4%#(./,/')%3

$ÏÎÇÇÕÁÎ #ÉÔÙȟ'ÕÁÎÇÄÏÎÇ
0ȣ2ȣ #ÈÉÎÁ υςσυσσ

-!4%2)!,ȣ .Ƭ!
0!24.5-"%2ȣ 4-χ3-ω&3ω&3πππ8Χ8
02/*%#4.!-%ȣ
2&*5-0%23

3):%
!τ
0!24.!-%ȣ
!339ȟπχψȟ ςȣωςȷ&ȣζ ςȣωςȷ&ȣ
2%6)3)/.ȣ !
$!4!ȣ 20ȣFebȣςπ

3#!,%ρȣρ
$/./4 3#!,% $2!7).'
3(%%4 ρ/& ρ