


1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

NOTES:

Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over
 Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over
 Spring : Stainless Steel
 Mechanical Characteristics:
 Spring Force : 60g ± 20% at Working Length
 Mechanical Life : 1,000,000 cycle
 Electrical Characteristics:
 Current Rating : 2A
 Contact Resistance : 20 mΩ Max
 Operating Temperature range : -55~125° C
 Packing: PE Bag.

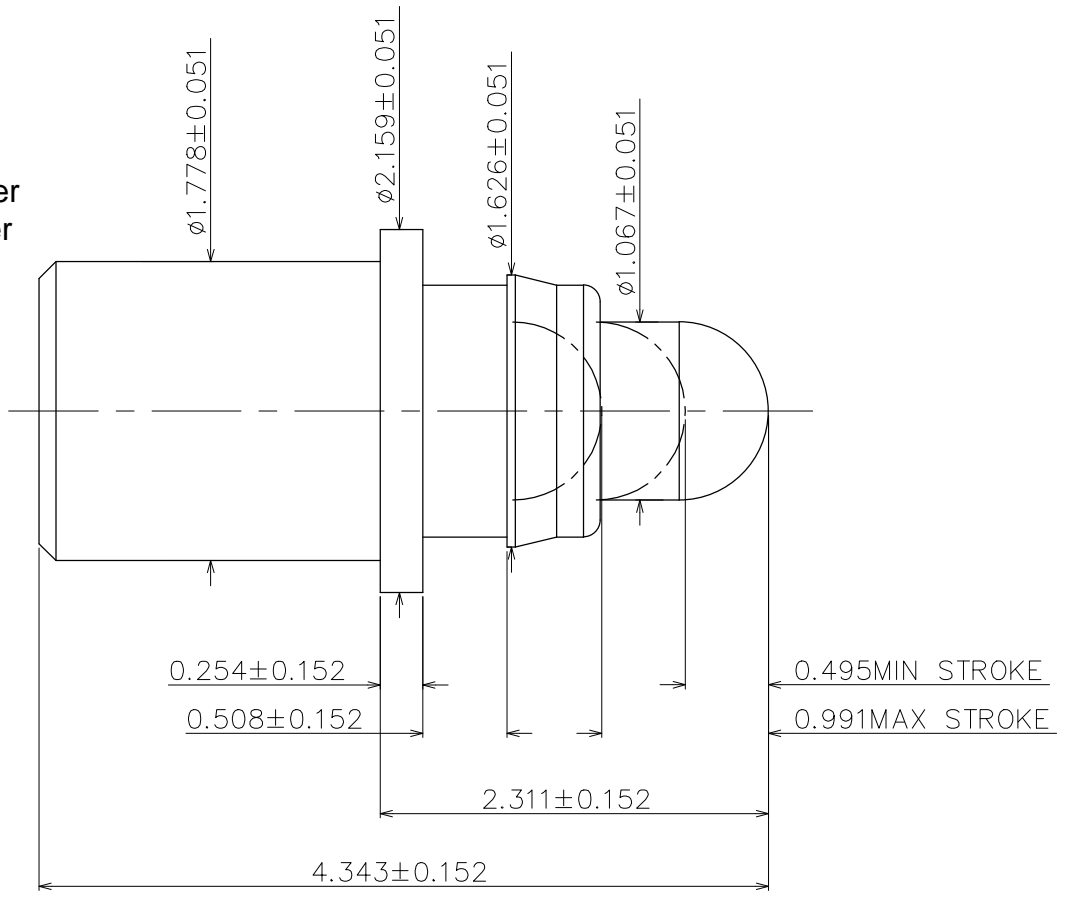

RoHS compliant
Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	28.03.2018	Tom	
X.X	±0.20					Approved	28.03.2018	Winnie	
X.XX	±0.10								ASSMANN WSW-No. A-CSL-S-020-B3
X.XXX	±0.08								
DIM	TOL								Drawing-No.
									ASS 7896 CO
Angle	±3°	Ⓢ	Drawn	28.03.2018	Tom	Replace	Sheet		
Angle	TOL	Id.	Modification	Date	Name				

1 2 3 4 5 6 7