

# RCM14-04 AC/DC RESIDUAL CURRENT MONITOR

The RCM14-04 is a residual current monitor intended for the detection of AC and DC residual currents in 60Hz AC installations.

The RCM14-04 is primarily intended for use in CCID20 Electric Vehicle charging stations to disconnect the supply to the Electric Vehicle under an AC and/or DC residual fault current condition.

The RCM14-04 may be used to detect AC and/or DC residual currents in DC, single phase or multiphase installations.

The RCM14-04 is a compact solution designed to be panel mounted. It has a JST connector for easy installation.

This product is fully compliant with the detection requirements of UL2231-2.

## MAIN FEATURES

- Operates from a 12V DC supply
- External Test Facility
- JST XH 2.5mm Pitch Connector JST:B4B-XH-A (LF) (SN)
- “Fault” signal output
- LED Indication for “On” and “Fault”
- For use with single or 3 phase loads
- ROHS compliant
- Complies with AC and DC detection requirements of UL2231 (CCID20)
- 3000A Surge Current Withstand
- 14mm Aperture



Order Code: 90148

## SEE ALSO

RCM14-01	6mA DC Detection to IEC62955, 14mm CT Aperture
RCM14-03	6mA DC/30mA AC Detection to IEC62752, 14mm CT Aperture
RCM14-04 SYSTEM	56mA DC/20mA AC Detection to UL2231-2, 14mm CT Aperture, PCB Mount Sensor Board + CT
RCM20-04	56mA DC/20mA AC Detection to UL2231-2, 20mm CT Aperture

## Supply Conditions

The RCM14-04 is intended for operation with a supply voltage of 12V DC +/- 10%. Performance may be compromised if the supply voltage is outside these limits.


## Fault Operation & Auto Reset

When a residual fault current that exceeds the rated AC or DC levels is detected, the RCM14-04 Output pin will switch to the "Fault" state within the specified response times. The Output pin will Auto-Reset when the fault is removed.

PIN OUT	
Pin 1	0V DC
Pin 2	+12V DC
Pin 3	External Test Facility
Pin 4	Fault Signal Output (Active High Open Drain)

See Application Sheet WA-AS-016 for Connection Diagram

TECHNICAL DATA	
Relevant Product Standard	UL2231-2 (CCID20)
Rated Operating Residual Current Limits - (IΔn)	56mA DC / 20mA AC
Rated Non-operating Residual Current Limit - (IΔno)	15mA AC
Response Time to residual current fault (time between appearance of fault to output going high)	According to UL2231-2
DC Supply Voltage (Vcc): Supply current (no fault present) Supply current (fault current >264mA)	12V DC ± 10% 3.5mA 40mA
Rated Load Current - Amps The RCM14 modules can accommodate single phase loads up to 100A or three phase loads up to 40A	100A Single Phase 40A 3 Phase
Test Function (Externally applied 12V DC) - Test Current Limit	3mA DC
Fault Signal Output Drain Current Pull up Voltage	Active High Open Drain 100mA Maximum 24V DC Maximum
Environmental Operating Conditions Absolute Temperature	-40°C to +85°C
Weight	45g

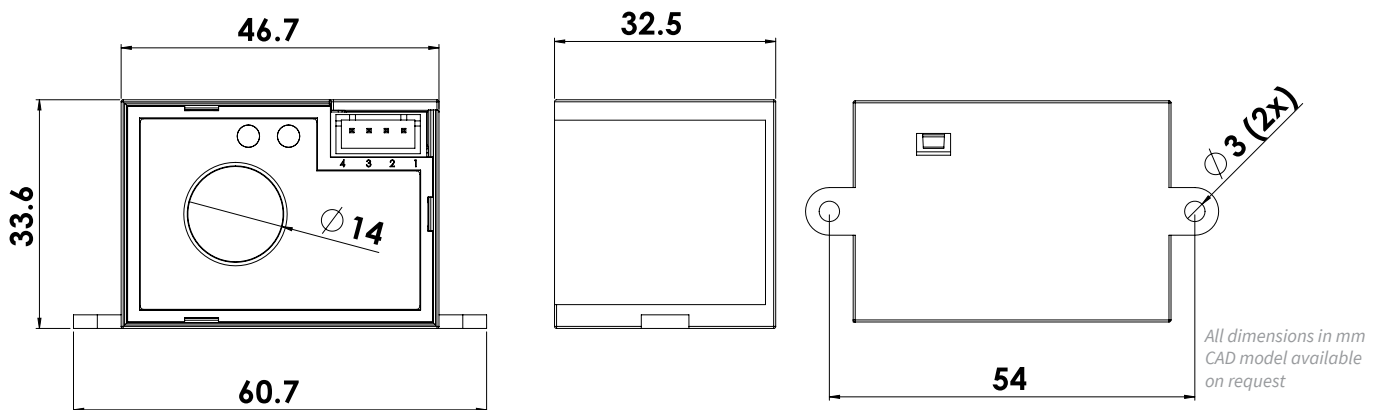

Disclaimer: Whilst every effort has been made to ensure the technical accuracy of this document, changes may be made to the document without notice based on information received by WA which necessitate such changes. WA ensures compliance of its products/technology with Product Standards relevant to the WA technology. However, the User of our products/technology has the sole responsibility to ensure that any Product that they produce which uses WA technology complies with the relevant Product Standards and Installation Rules as applicable to the end Product using the WA technology.