

6

5

4

3




2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/21	

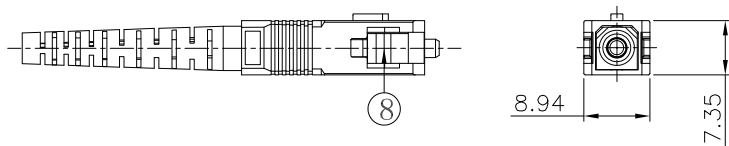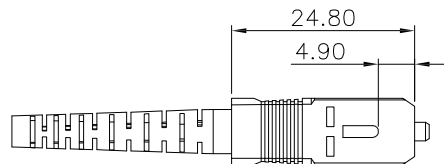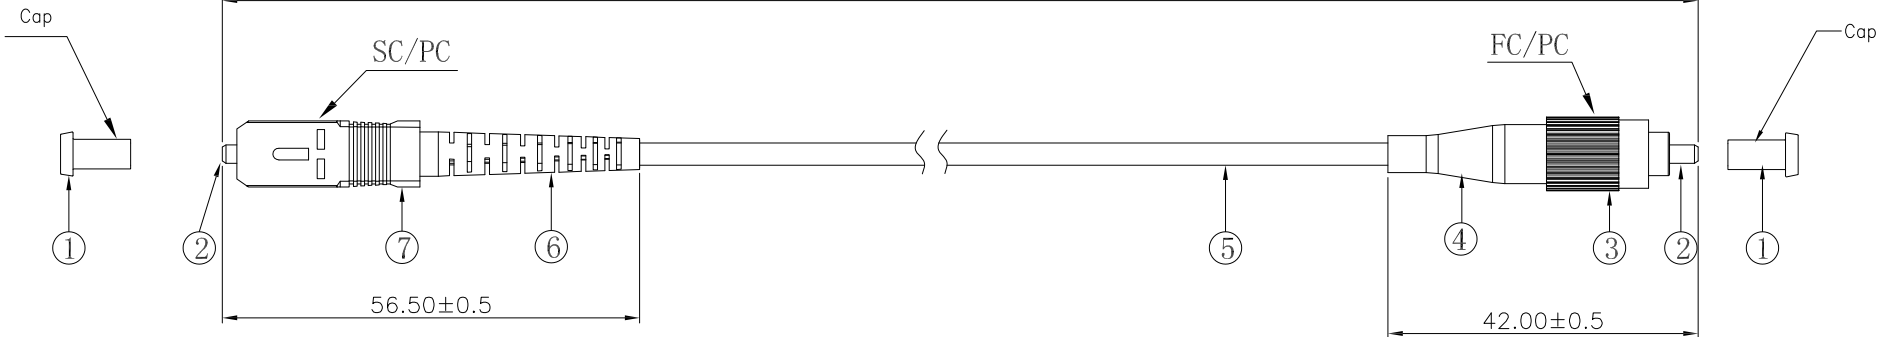

SC drawing

8	SC Small Plastic	PBT White
7	SC Outer Shell	PBT Blue
6	SC Tail Sleeve	PVC Blue
5	Fiber optic cable	Fiberglass Shuck PVC Yellow
4	FC Tail Sleeve	PVC Black
3	FC Outer Shell	Metallic plating Ni
2	Ceramic core	Ceramic White
1	CAP	PP White
No	Name	Material

**SPECIFICATIONS:**

Electrical:  
Standards of IEC,EIA/TIA, Telcordia  
Return loss: 40dB min  
Insertion loss: 0.20dB max  
Temperature Rating:  
Operating temperature: -25°C to +70°C  
Environmental:  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED					909 Rahway Avenue, Union, NJ 07083									
<table border="1"> <tr><td>1~10</td><td>±1.00</td></tr> <tr><td>11~30</td><td>±2.00</td></tr> <tr><td>31~50</td><td>±3.00</td></tr> <tr><td>51~200</td><td>±5.00</td></tr> <tr><td>&gt;200</td><td>±7.00</td></tr> </table>					1~10	±1.00	11~30	±2.00	31~50	±3.00	51~200	±5.00	>200	±7.00
1~10	±1.00													
11~30	±2.00													
31~50	±3.00													
51~200	±5.00													
>200	±7.00													
DRAWN JJ 5/25/21			<b>TITLE</b> CUSTOM ASSEMBLY, OPTICAL SC ADAPTOR, 1 PORTS , PLUG W/STRAIN RELIEF		Fax: 908-687-5710									
CHECKED JL 5/25/21					REF: S00005C									
APPROVED			<b>SIZE</b> X		<b>PART NO.</b> CA #OPSN1PNNC1NSR-C1									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			<b>REV.</b> -		<b>SCALE:</b> NTS <b>SHEET</b> 1 OF 1									

6

5

4

3

2

1