
Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/19/18	Α	Added "Water Resistance Type"	T.B.	B.S.	
04/12/19	В	Updated to "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	С	Was rated 30 amp. Dim. 152.40 was 130.18	T.B.	B.S.	
11/10/23	D	Dim. 138.0 was 152.40 Din. 54.80 was 44.30 Dim. 24.60 was 24.30 Dim. 8.10 was 7.35 Updated Specifications	D.L.	B.S.	

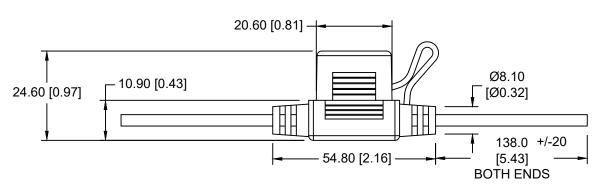

WATER RESISTANT TYPE

NOTES:

- 1. MATERIAL:
 - HOUSING: PVC,94HB, FLEX 60GPVC,
- 2. WIRE: RED WIRE, 12~16 AWG, 600V, 105°C, FLAME RATED VW-1, UL FILE NO. E250011 OR ENGINEERING APPROVED EQUIVALENT
- 3. RATED CURRENT: 30A
- 4. ACCEPTS ATM/ASP FUSES
- 5. INSULATION RESISTANCE AT 500V DC: $100M\Omega$ MIN
- 6. CONTACT RESISTANCE: 5mΩ AT 1A DC
- 7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1000V MIN ROHS COMPLIANT

Tolerance (Except as noted)	MPD Mem	ory Prote	ction I	Devices, Inc		
(Except as noted)	HEMORY PROTECTION DEVICES	200 Broad Hollow Road, Farmingdale, New York 11735				
decimal			Scale	Drawn By B.S.		
±.5 (.020)				Approved By T.B.		
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER					
Angular	Date	Drawing Number				
± 3°	11/10/23	BF353S				