


ITEM	PART#	DESCRIPTION	QTY	UOM
A	348033212	CTX64 RCPT TERM ST SN L DWIND MS GEN	1	PC

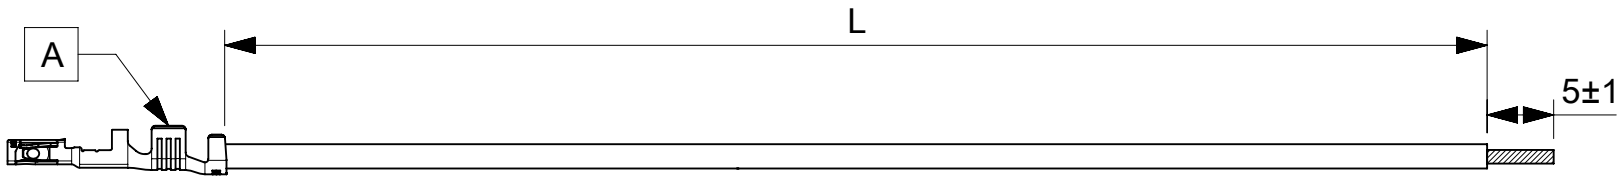

PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2244521111	Stac64 F-S 75mm 0.75sq.mm Lead BK Sn	1C X 0.75SQMM EBXL BK OD=1.85MM FLR2X-A	75±3	BLACK
2244521112	Stac64 F-S 150mm 0.75sq.mm Lead BK Sn	1C X 0.75SQMM EBXL BK OD=1.85MM FLR2X-A	150±4	BLACK
2244521113	Stac64 F-S 225mm 0.75sq.mm Lead BK Sn	1C X 0.75SQMM EBXL BK OD=1.85MM FLR2X-A	225±4	BLACK
2244521114	Stac64 F-S 300mm 0.75sq.mm Lead BK Sn	1C X 0.75SQMM EBXL BK OD=1.85MM FLR2X-A	300±4	BLACK
2244521115	Stac64 F-S 450mm 0.75sq.mm Lead BK Sn	1C X 0.75SQMM EBXL BK OD=1.85MM FLR2X-A	450±4	BLACK

- NOTES:
1. CRIMPING TO BE DONE AS PER MOLEX STANDARDS.
 2. THE PRODUCT SPECIFICATION RELIES ON THE TERMINALS & WIRE SPEC.
 3. FREE ENDS MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIAMETER MUST BE 2.5MM MAX.
 4. TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
02/20/2023	A	INITIAL RELEASE	MARUTG

DOCUMENT STATUS	P1	RELEASE DATE	2023/12/01 08:00:56
-----------------	----	--------------	---------------------

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		 SEE TABLE PRODUCT CUSTOMER DRAWING
	DIMENSION UNITS	SCALE	EC NO: 769866		
	mm	NTS	DRWN: ASHLYR1 2023/11/24		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SKUMAR07 2023/12/01		
DIVISIONAL SYMBOLS	ANGULAR TOL	±	°	APPR: SKUMAR07 2023/12/01	DOCUMENT NUMBER: 2244521111 DOC TYPE: PSD DOC PART: 000 REVISION: B
	4 PLACES	±		INITIAL REVISION:	
	3 PLACES	±		DRWN: MARUTG 2023/02/20	
	2 PLACES	±		APPR: SKUMAR07 2023/03/16	
1 PLACE	±				MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1
0 PLACES	±				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	
			A4-SIZE	224452	