

客户料号:MDC515RC13-V1

产品图号:



版次 A/0

详细描述

变更日期

变更者

*458 ± 30

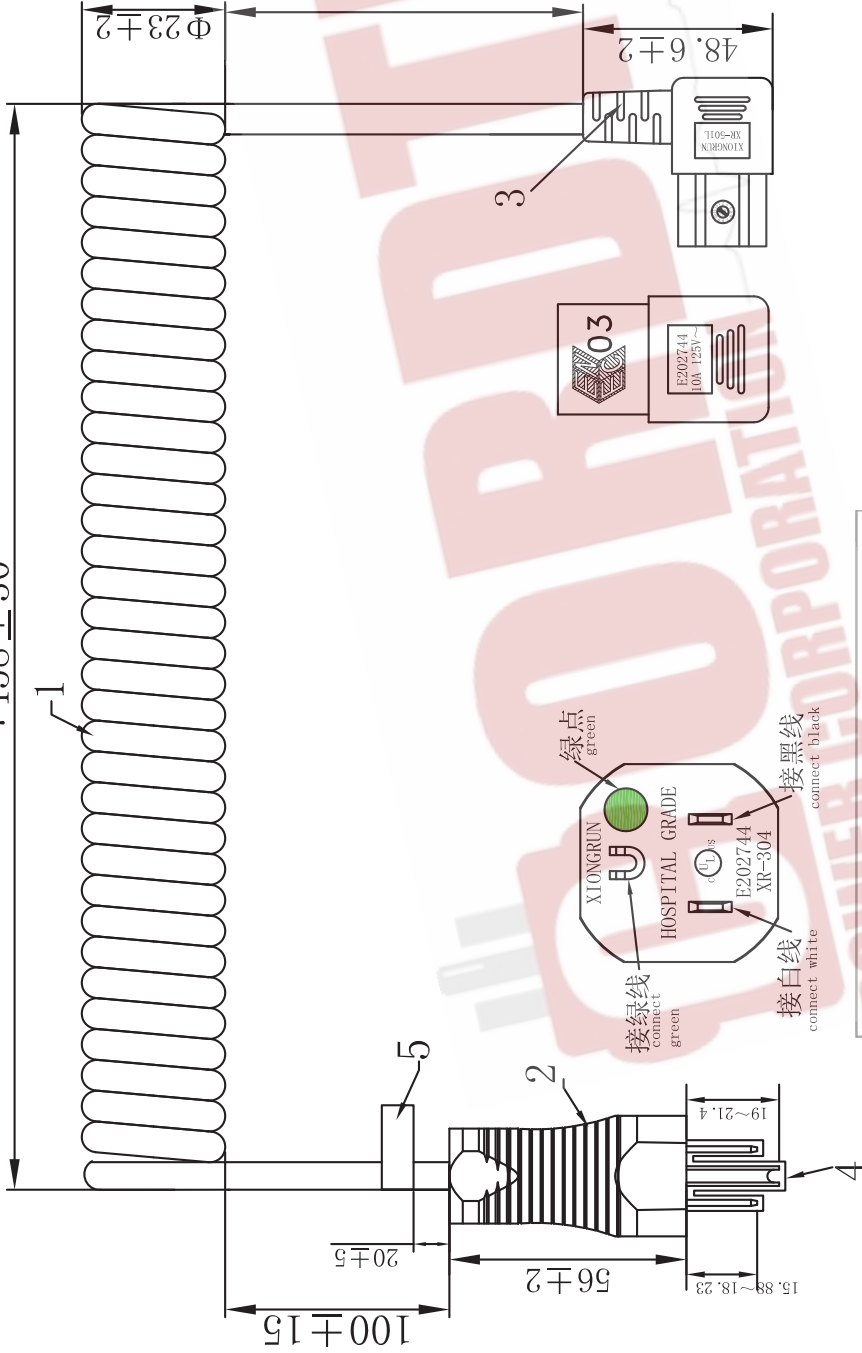

技术要求:requirement:

- 1:耐压测试:外高压4200V/S;内高压1500V/S; 0.5MA Dielectric voltage :between jacket and conductors 4200V/S between conductors 1500V/S
- 2:绝缘阻抗不小于100兆欧. Insulation resistance 100MΩ.
- 3:100%导通OK. Continuity of lead 100% OK.
- 4:符合ROHS. RoHS COMPLIANT.
- 5:母插不能有不紧密造成之後露芯线
- 6:注意尾插颜色按线材颜色配色,保持一致

CORDTEC POWER CORPORATION
CONFIRMED

2021.09.24
Chen Tony

CORDTEC
POWER CORPORATION

AC Connectors of Cordtec Power Corp
Main: 1-414-434-2220 Fax: 1-414-323-8386 Text: 1-414-323-3240
Email: Info@CordtecPower.com
Website: CordtecPower.com/ ACWORKS.com

NO.	DESCRIPTION	QTY	unit
5	UL标签 (适用美国与加拿大) label	1	EA
4	医疗三插头护套 dust cap	1	EA
3	品字尾插座IEC C13 (XR-50LL), COLOR:10C 灰色,gray, PVC	1	EA
2	医疗插 (XR-304-1) HOSPITAL GRADE, COLOR:透明clear, PVC	1	EA
1	SJTW 18AWG3C 105°C, COLOR:10C 灰色,gray	1	EA