


MICRO COAX Cable with IPEX Cabline CA

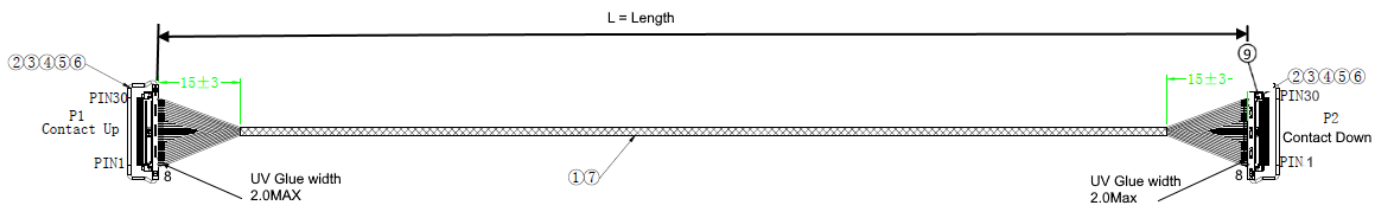

Drawing (only for reference) shows round binding with acetate cloth tape

1 wire – micro coax	AWG 42/ 50Ω green UL11130
2 / 3 / 4 connector IpeX Cabline CA – 0.4 pitch / (12-60 Pos.)	Plug: 20634-2xxT-02; Shell: 2764-0xx1-002; Pull Bar 2766-0xx1 / (Receptacle 20525-0xxE-02)
5 / 6 Ground Bar /Kapton	WG/B-002DA // Kapton
7 Binding	Round binding with acetate cloth - E304309 >800mm Partial Round Binding
8 UV Glue	HD1232
9 Laser marking	Aix CCA YY.MM
Transfer rate	20Gbps
Operation temperature / rated voltage	-35°C - +85°C / 30V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers



How to Order

CCA – nn – LLL – ii – B C

C=Connection
1=Connection 1:1
N=Connection 1:N
X-000N customer specific

B=Binding
0=(null) w/o Binding
R=Round with Acetate Cloth
P= Partial Round Binding
F=Flat with Acetate Cloth
S=Spiral
L=Laminated

ii=Impedance e.g. 50Ω

LLL=Length in mm optional

nn=No. of Position

CCA=Series Name: IPEX Cabline CA

For Example: CCA-30-300-50-R1

MICRO COAX Cable with IPEX Cabline CA

For Custom Solution fill in this Form

*1 Use Supplier Pin Count

*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

*3 Depending on Connector Specification – make sure wires of the same type are together

Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				