

**8321 / 4CX350A  
8322 / 4CX350F  
Radial - Beam  
Power Tetrodes**



The Penta Laboratories 8321 / 4CX350A and the 8322 / 4CX350F are compact radial beam tetrodes with a maximum plate dissipation of 350 watts. The intended use for these radial beam tetrodes is for Class - AB<sub>1</sub> audio or RF amplifier service. The 8321 / 4CX350A and the 8322 / 4CX350F differ only in the heater voltage and current.

**GENERAL CHARACTERISTICS**

**ELECTRICAL**

Cathode:	Oxide-Coated, unipotential .....	Min.	Nom.	Max.	
	Preheating Time.....	30		60	sec
	Cathode-to-Heater potential .....			±150	volts
Heater:	4CX350A Voltage.....		6.0		volts
	4CX350A Current.....	2.9		3.6	amps
	4CX350F Voltage.....		26.5		volts
	4CX350F Current.....	0.66		0.81	amps
Amplification Factor (Grid-to-Screen) .....			13		
Transconductance (I <sub>b</sub> = 150 mA) .....			22,000		umhos
Direct Interelectrode Capacitances, Grounded Cathode:					
	Input.....	22.2		26.2	uuf
	Output.....	5.0		6.0	uuf
	Feedback.....			0.01	uuf

**MECHANICAL**

Base .....	Special 9-pin
Maximum Operating Temperatures:	
Ceramic-to-Metal Seals.....	250° C
Anode Core .....	250° C
Recommended Socket .....	PSK-600 Series

Revised 23 Nov 2022



**P E N T A   L A B O R A T O R I E S**

14399 PRINCETON AVENUE \* MOORPARK \* CALIFORNIA 93021  
(800) 421-4219 \* (818) 882-3872 \* FAX: (818) 882-3968

**ELECTRON TUBES FOR INDUSTRY**



# 4CX350A / 4CX350F - Radial - Beam Power Tetrode

Operating Position .....	Any
Maximum Dimensions:	
Height .....	2.464 inch
Seated Height .....	1.910 inch
Diameter .....	1.640 inch
Cooling .....	Forced air
Net Weight .....	4 ounces
Shipping Weight (approximate) .....	1.6 pounds

## AUDIO-FREQUENCY AMPLIFIER OR MODULATOR

Class AB<sub>1</sub>

Maximum Ratings (per tube)

DC Plate Voltage .....	2500	max.	volts
DC Screen Voltage .....	400	max.	volts
DC Plate Current .....	300	max.	ma
Plate Dissipation.....	350	max.	watts
Screen Dissipation.....	8	max.	watts
Grid Current.....	2	max.	ma

TYPICAL OPERATION (Sinusoidal wave, two tubes unless noted)

DC Plate Voltage .....	1000	1500	2200	volts
DC Screen Voltage .....	400	400	400	volts
DC Grid Voltage <sup>1</sup> .....	-27	-27	-27	volts
Zero-Signal DC Plate Current.....	200	200	200	mA
Max-Signal DC Plate Current .....	520	530	580	mA
Max-Signal DC Screen Current.....	-8	-10	-6	mA
Effective Load, Plate to Plate .....	2600	5000	7800	ohms
Peak AF Grid Input Voltage (per tube)* .....	21	21	50	volts
Driving Power .....	0	0	0	watts
Max-Signal Plate Input Power .....	560	800	1260	watts
Max-Signal Plate Output Power .....	190	400	770	watts

\* Approximate values.

1) Adjust grid bias to obtain listed zero-signal plate current.

## RADIO-FREQUENCY LINEAR AMPLIFIER

Class AB<sub>1</sub> (Single-Sideband Suppressed-Carrier Operation)

Maximum Rating

DC Plate Voltage .....	2500	max.	volts
DC Screen Voltage .....	400	max.	volts
DC Plate Current .....	300	max.	ma
Plate Dissipation.....	350	max.	watts
Screen Dissipation.....	8	max.	watts
Grid Current.....	2	max.	ma



# 4CX350A / 4CX350F - Radial - Beam Power Tetrode

TYPICAL OPERATION (Peak-envelope conditions except where noted)

DC Plate Voltage .....	1000	1500	2200	volt
DC Screen Voltage .....	400	400	400	volt
DC Grid Voltage <sup>1</sup> .....	-27	-27	-27	volts
Zero-Signal DC Plate Current.....	100	100	100	mA
Peak RF Grid Voltage* .....	21	21	25	volt
DC Plate Current .....	260	265	290	mA
DC Screen Current* .....	-4	-5	-3	mA
Plate Input Power .....	260	400	630	watt
Plate Output Power .....	95	200	385	watt
Two-Tone Average DC Plate Current .....	210	215	195	mA
Two-Tone Average DC Screen Current .....	-7	-8	-3	mA
Resonant Load Impedance .....	1300	2500	3900	ohm

\* Approximate values.

1) Adjust grid bias to obtain listed zero-signal plate current.

## MECHANICAL

**MOUNTING** - The 4CX350A and 4CX350F may be operated in any position. Sockets are available with or without built-in screen by-pass capacitors and may be obtained with either grounded or ungrounded cathode terminals.

**COOLING** - Sufficient cooling must be provided for the anode, base seals and body seals to maintain operating temperatures below the rated maximum values. Air requirements to maintain seal temperatures at 225 °C in 50 °C ambient air tabulated on page 3.

At 500 mc or below, base-cooling air requirements are satisfied automatically when the tube is operated in an Air - System Socket and the recommended air-flow rates are used. Experience has shown that if reliable long life operation is to be obtained, the cooling air flow must be maintained during standby periods when only the heater voltage is applied to the tube. The anode cooler should be inspected periodically and cleaned when necessary to remove any dirt, which might interfere with effective cooling.

The blower selected in a given application must be capable of supplying the desired air flow at a back pressure equal to the pressure drop shown below, plus any drop encountered in ducts and filters. The blower must be designed to deliver the air at the desired altitude.

If cooling methods other than forced air are used, if the recommended air-flow rates are not supplied or if there is any doubt that the cooling is adequate, it should be borne in mind that operating temperature is the sole criterion of cooling effectiveness. One method of measuring the surface temperatures is by the use of a temperature-sensitive lacquer. When temperature-sensitive materials are used, extremely thin applications must be used to avoid interference with the transfer of heat from the tube to the air stream, which would cause inaccurate indications.

## MINIMUM COOLING AIR-FLOW REQUIREMENTS

Plate Dissipation (Watts)	SEA LEVEL		10,000 FEET	
	Air-Flow (CFM)	Pressure Drop (Inches Of Water)	Air-Flow (CFM)	Pressure Drop (Inches Of Water)
250	5.3	0.6	7.7	0.85
300	6.5	0.9	9.5	1.25
350	7.8	1.2	12.0	1.9


**VIBRATION** - These tubes are capable of satisfactorily withstanding ordinary shock and vibration, such as encountered in shipment and normal handling. The tubes will function well in automobile and truck mobile installations and similar environments.



# 4CX350A / 4CX350F - Radial - Beam Power Tetrode

- PIN NO. 1. SCREEN GRID
- PIN NO. 2. CATHODE
- PIN NO. 3. HEATER
- PIN NO. 4. CATHODE
- PIN NO. 5. I.C. DO NOT USE FOR  
EXTERNAL CONNECTION
- PIN NO. 6. CATHODE
- PIN NO. 7. HEATER
- PIN NO. 8. CATHODE
- CENTER PIN - CONTROL GRID

DIMENSIONS IN INCHES			
DIMENSIONAL DATA			
DIM.	MIN.	MAX.	REF.
A	2.324	2.464	
B	1.610	1.640	
C	1.810	1.910	
D	.750	.910	
E	.710	.790	
F		1.406	
G	.187		
H	BASE: B8-236 (JEDEC DESIGNATION)		
J	.559	.573	
K	.240		

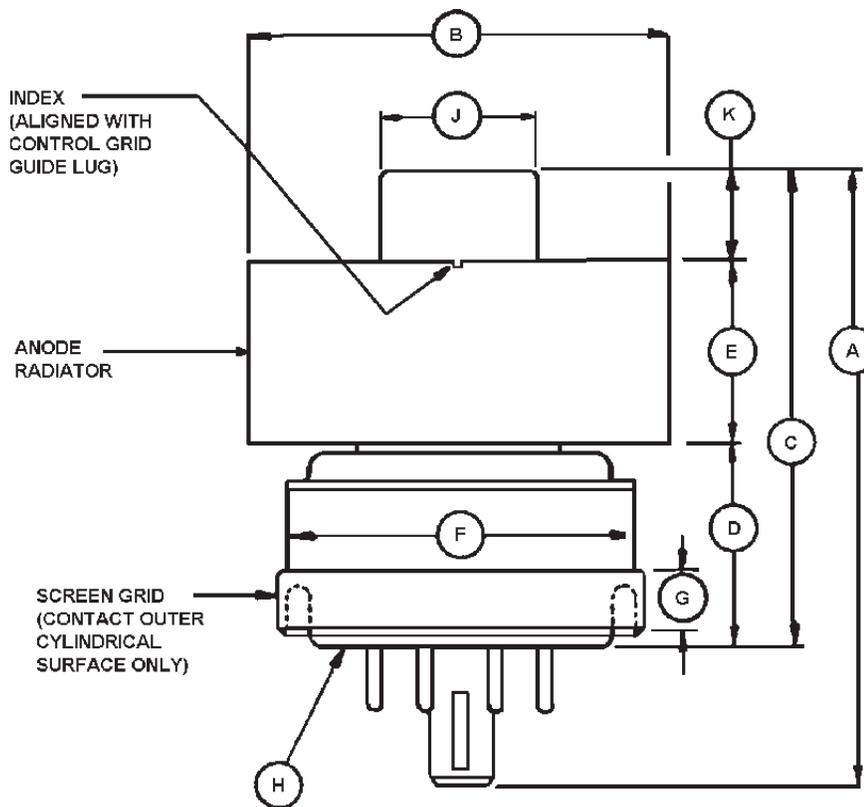

- NOTES:  
1. \* CONTACT SURFACE  
2. REF. DIMENSIONS ARE FOR  
INFORMATION ONLY AND ARE  
NOT REQUIRED FOR INSP.  
PURPOSES.



# 4CX350A / 4CX350F - Radial - Beam Power Tetrode

