



SGW2828-EVK Evaluation Kit

PC Software User Manual

April 2023 V1.2

Contents

1. Introduction	1
2. Required Tools	1
3. Operation Guide	2
a. Preparation	2
b. Configuration of PC Software	2
c. User Application Mode	3
d. Engineering Mode	4
4. Related Documents and Useful Links	8
5. Revision History	9

1. Introduction

The SGW2828-EVK is a evaluation kit (Figure 1) designed for the development and Proof-of-concept testing of applications based on the SGW2828-01A LoRa Module. With the associated PC software, testing is easily enabled when two or more users are connected and using the same frequency channel. The PC software is supported by Windows operating systems (Windows 10).

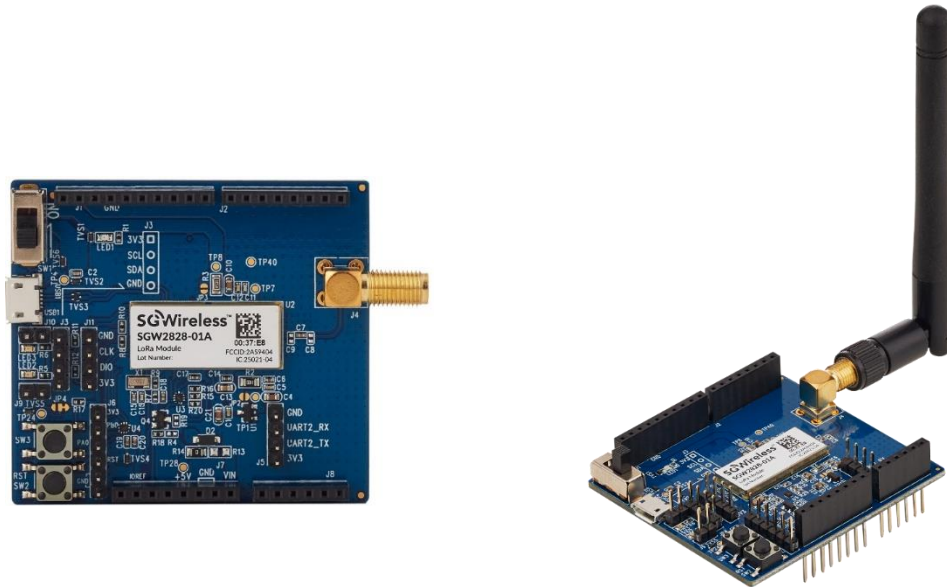


Figure 1: SGW2828-EVK LoRa Evaluation Kit

2. Required Tools

The SGW2828 Module's long-range and wall-penetrating capabilities are best demonstrated when testing is conducted with at least two individual users.

Each user should be equipped with the following:

- a. SGW2828-EVK LoRa Evaluation Kit
- b. +2dBm SMA antenna
- c. Micro-USB cable
- d. PC with Windows 10 or above
- e. SGW2828-EVK PC Tool program

3. Operation Guide

a. Preparation

1. Download the SGW2828-EVK PC software file at <https://www.sgwireless.com/uploads/product/files/SGW2828%20PC%20Tools%20V1.5.1.zip>. Extract the file for the SGW2828-PC-Tool program.
2. Prepare the SGW2828-EVK by screwing on the antenna, then connect the SGW2828-EVK to the PC with the micro USB cable (Figure 2). Toggle the power switch to ON.
3. Run the SGW2828-PC-Tool program.



Figure 2: SGW2828-EVK to PC Connection

b. Configuration of PC Software

1. Select the COM port number assigned for the connected SGW2828-EVK, then click 'Connect'. The COM port number may be different for each user, and can be found through Device Manager > Ports (COM & LPT) (Figure 3).

Remarks: If the desired COM port number is not showing in the drop-down menu, click 'Refresh'.

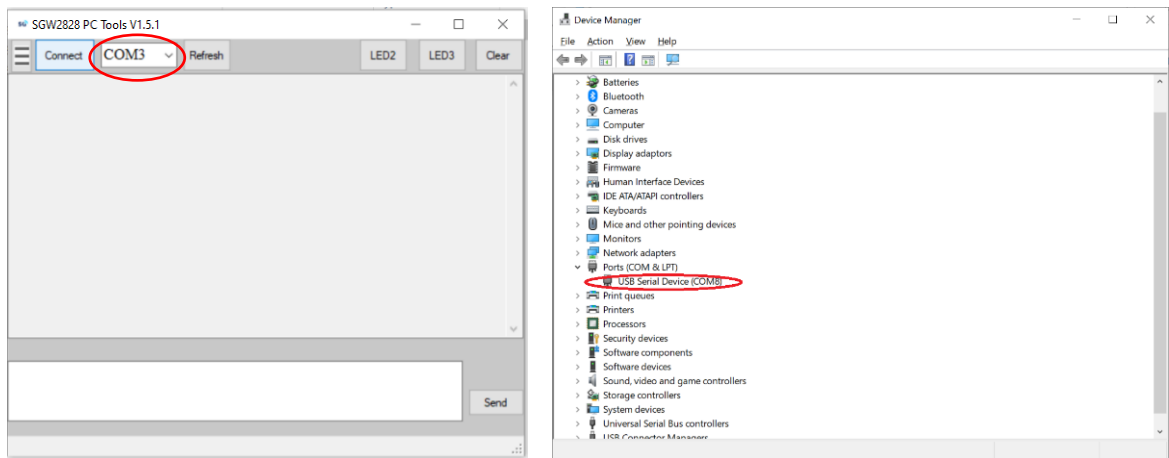


Figure 3: SGW2828-EVK PC Tool COM Port Selection

2. Configure the RF Parameter, if needed. Users can use the default parameter settings or configure their own at Menu > Configuration > RF Parameter (Figure 4). Data transmission is enabled when **users use the same parameter settings.**
 - 'Read': Read current parameter settings of connected SGW2828-EVK
 - 'Write': Save customized settings
 - 'Fast Rate'/'Normal'/'Long Range': Use pre-configured settings

- 'Default': Reset to default settings

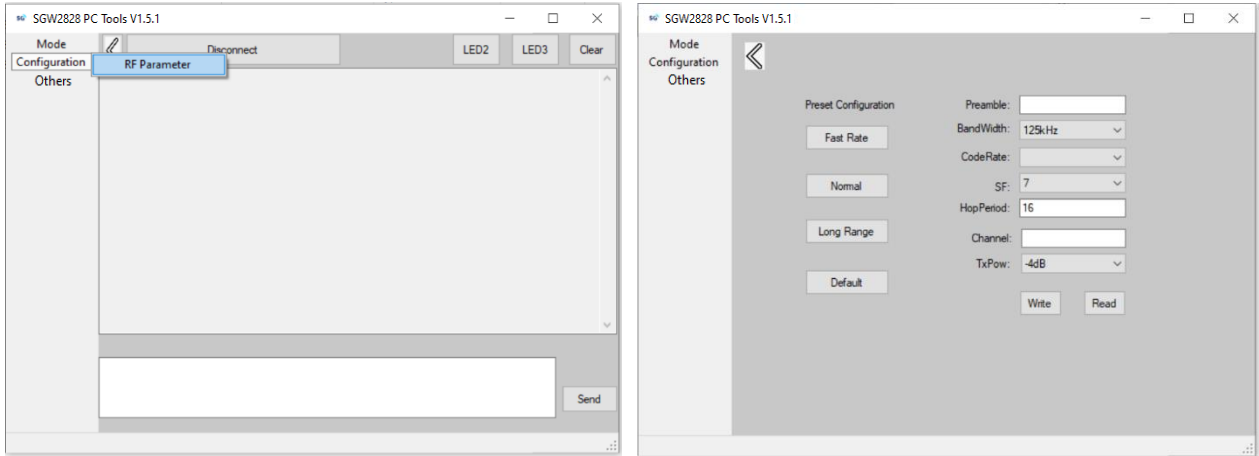


Figure 4: RF Parameter Configuration

Table 1: Preset Parameters

Pre-configured Parameters	Fast Rate	Normal	Long Range	Default
Preamble	16	16	16	16
Bandwidth	500kHz	250kHz	125kHz	250kHz
Code Rate	1	1	4	1
SF	7	9	12	7
Hop Period	0	0	0	0
Channel	0	0	0	0
TxPow	-4dB	4dB	4dB	4dB

c. User Application Mode

User Application mode enables several tests for the SGW2828-EVK capabilities and proof-on-concept development:

- i. LED ON/OFF
- ii. Text

The PC Tool is set to User Application mode by default, and can be accessed in Engineering mode by Menu > Mode > Application Mode (Figure 5).

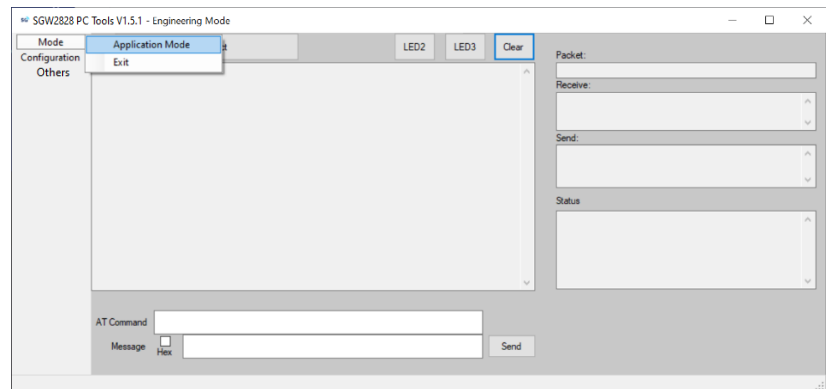


Figure 5: Toggle to Application Mode

i. LED ON/OFF (Figure 6)

Click 'LED2' and 'LED3' to toggle the LEDs on or off on remote users' SGW2828-EVK. Messages will show up in the message boxes of both local and remote users' PC Tool.

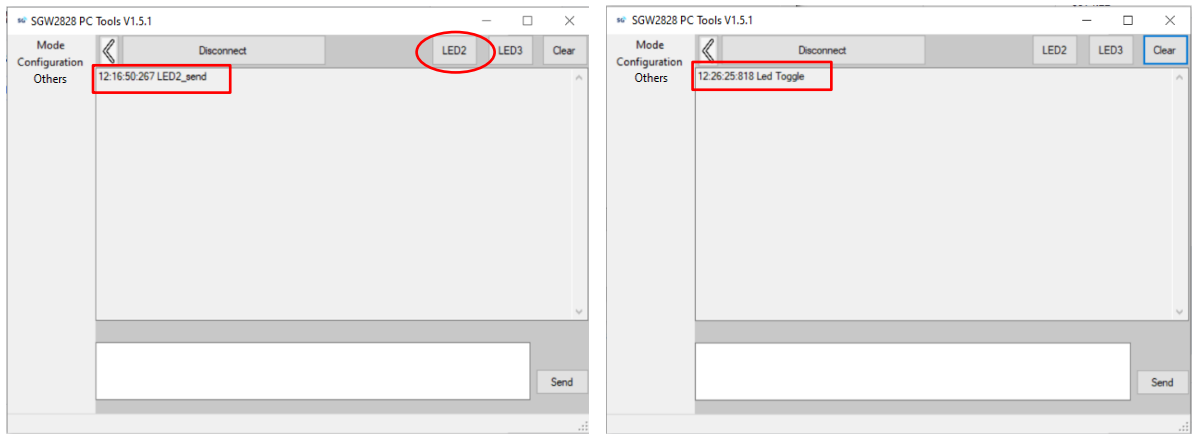


Figure 6: LED Testing on Local (left) and Remote (right) PC Tool

ii. Text (Figure 7)

Input messages in the message box and click 'Send'. Messages will show up in the message boxes of both local and remote users' PC Tool.

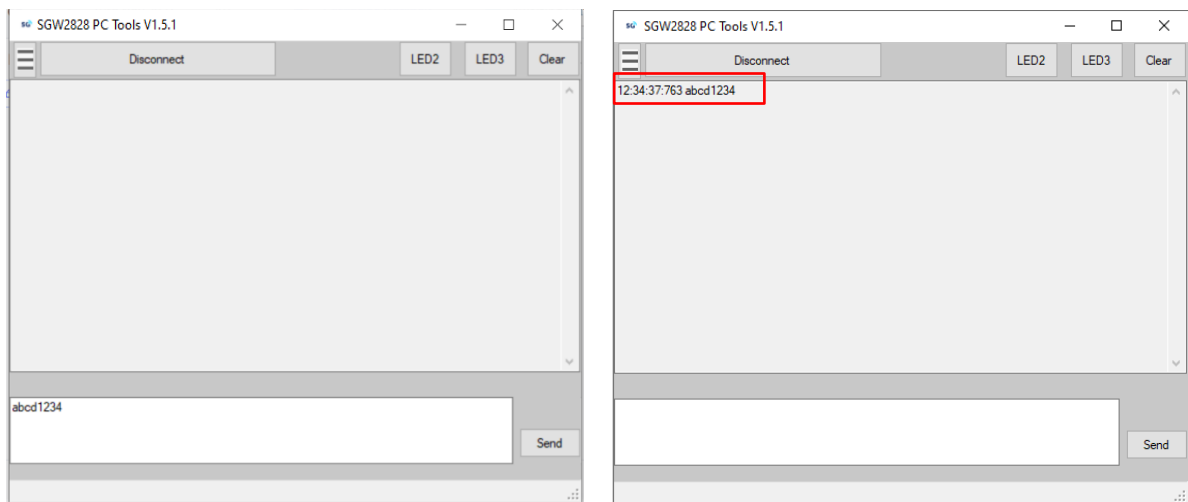


Figure 7: Text Testing on Local (left) and Remote (right) PC Tool

d. Engineering Mode

Engineering mode is designed for AT command testing, for example:

- i. Get firmware version
- ii. Send text thru AT command

The PC Tool is set to User Application mode by default, and Engineering mode can be accessed by Menu > Mode > Engineering Mode (Figure 8).

Remarks: Please refer to AT Command Application Note for complete AT command list.

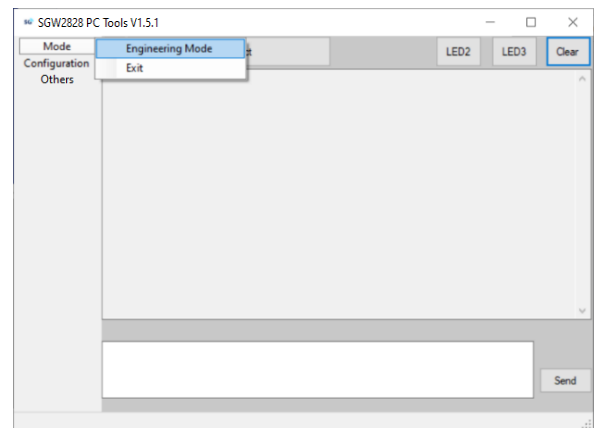


Figure 8 Toggle to Engineering Mode

i. *Get Firmware Version (Figure 9)*

Type command **AT+VERSION=?** In the command input box and click 'Send'. The firmware name and version number will be shown in message box.

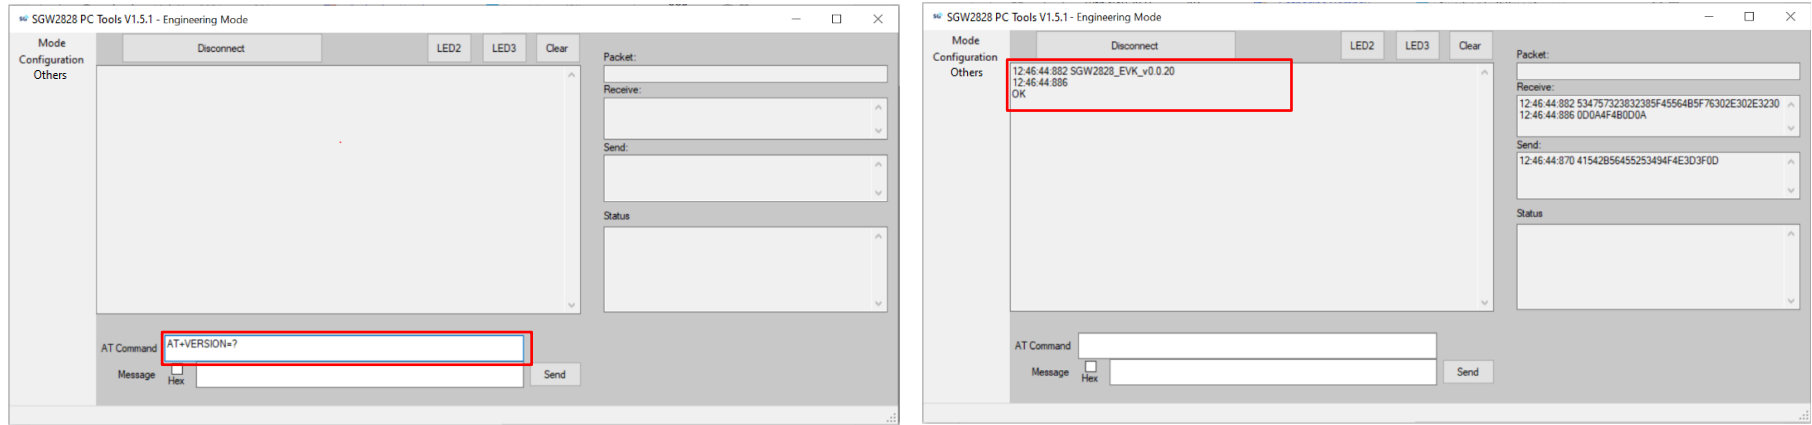


Figure 9: AT Command for Firmware Version

ii. *Send Text Thru AT Command*

Type **AT+RF_SEND=1,0,4** in command input box and type text (e.g. abcd) in the message input box and click 'Send' (Figure 11). Tick the Hex box if the message is in Hex format data.

Remarks: Please refer to AT Command Application Note for complete AT command list.

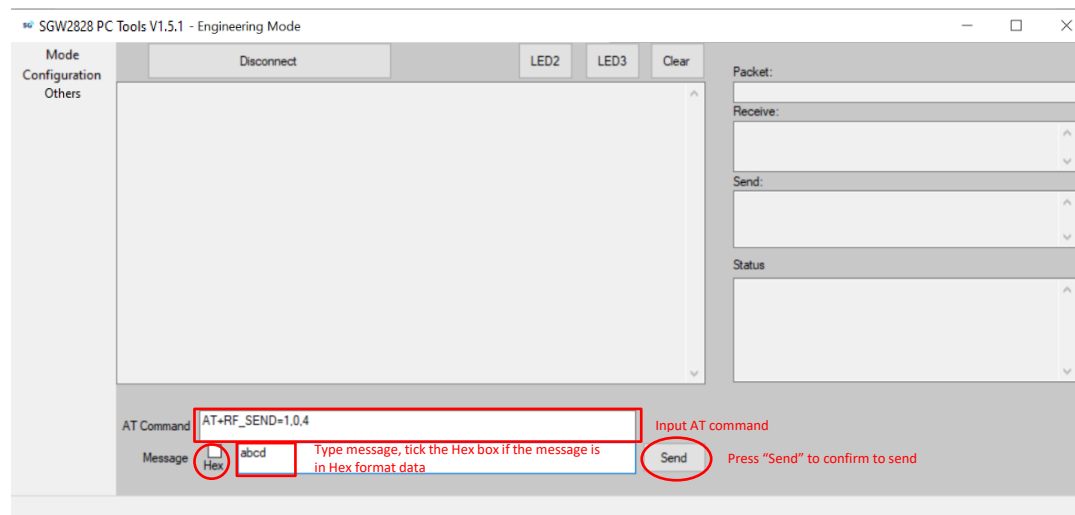


Figure 10: AT+RF_SEND Command

On the local PC Tool, the sent message will be shown in Hex format in the message box on the left, while details of data received and sent will be shown in the message box to the right (Figure 11).

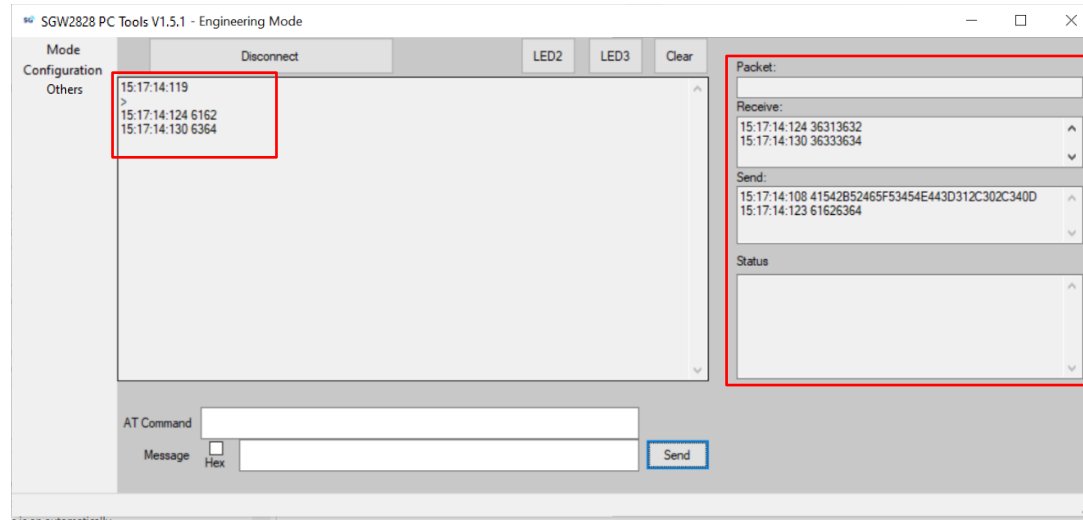


Figure 11 AT+RF_SEND Command Sent Message on Local PC Tool

On the remote PC Tool, the received message will be shown in the message box to the left, with details in the message box to the right (Figure 12). Hexidecimal values will only be shown in the message box to the right.

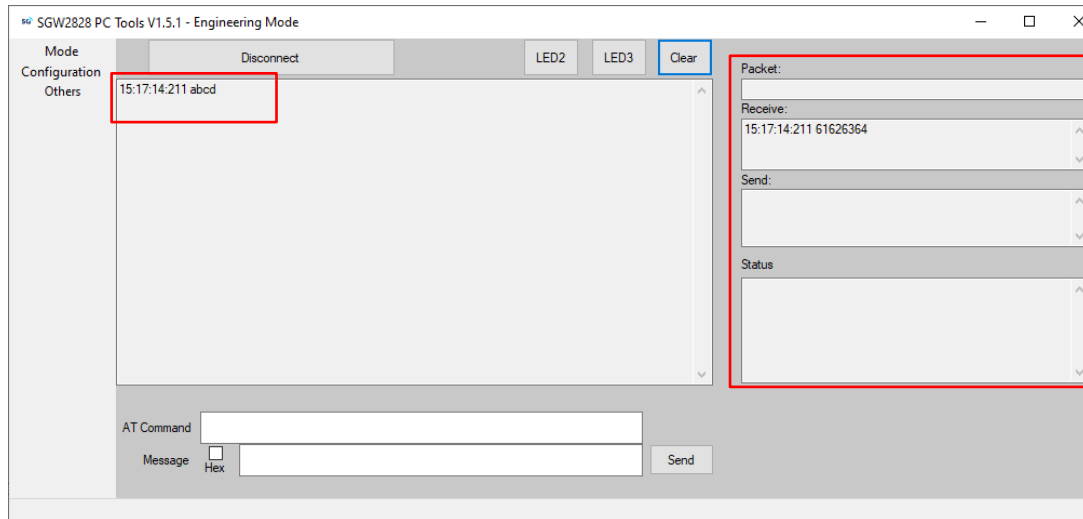


Figure 12: AT+RF_SEND Command Sent Message on Remote PC Tool

e. Firmware Upgrade

When available, firmware updates can be made at Menu > Others > Firmware Upgrade (Figure 13).


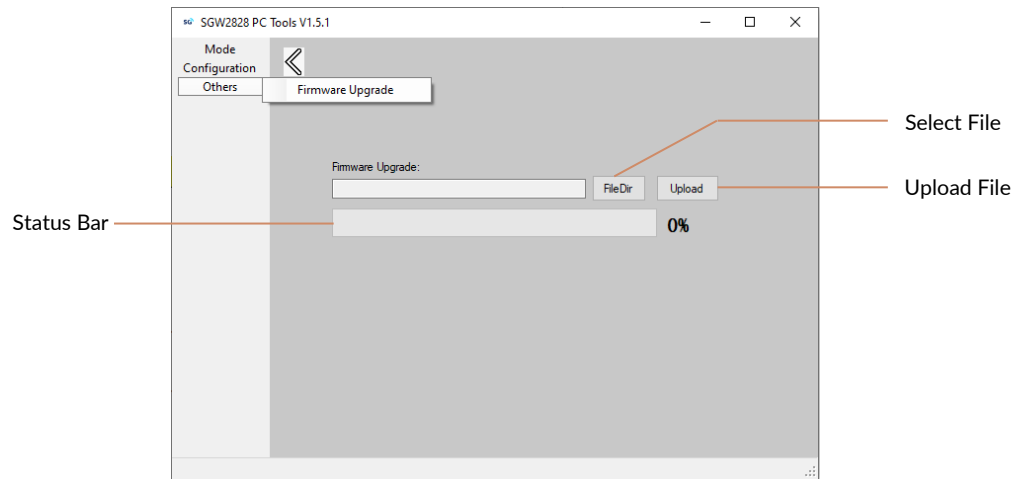


Figure 13: Toggle to Firmware Upgrade

Click 'FileDir' to select the firmware file, then click 'Upload' to start the upgrade. A progress bar will appear – please stay on the page until the upgrade procedure is complete (Figure 14).

After firmware upgrade is completed, click the Arrow to return to the main page. Then check the firmware version in Engineering Mode by command **AT+VERSION=?** to ensure upgrade is completed.

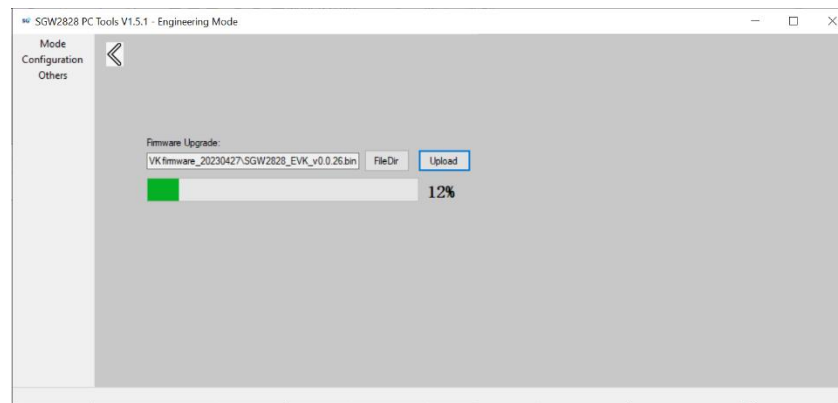

4. Related Documents and Useful Links

1. PC Software Download: <https://www.sgwireless.com/uploads/product/files/SGW2828%20PC%20Tools%20V1.5.1.zip>
2. SG Wireless SGW2828-01A LoRa Module: <https://sgwireless.com/product/SGW2828>.
3. SG Wireless SGW2828 LoRa Module AT Command User Manual: <https://www.sgwireless.com/uploads/product/files/USGA5.03-V2.0%20SGW2828%20LoRa%20Module%20AT%20Command%20User%20Manual.pdf>
4. Semtech SX1276 Documentation: <https://www.semtech.com/products/wireless-rf/lora-transceivers/sx1276>.
5. Segger J-Link Download: <https://www.segger.com/downloads/jlink/>.

Revision History

Revised	Version	Description
13-Oct-2020	1.0	Initial document release
21-Dec-2022	1.1	Update on PC Tool version
28-Apr-2023	1.2	Add firmware upgrade feature

Contact us at cs@sgwireless.com for any queries, or find us at any channel below:

Website: <https://sgwireless.com/>

LinkedIn: <https://www.linkedin.com/company/sgwireless/>

Facebook: <https://www.facebook.com/sgwirelessIoT>

Twitter: [@sgwirelessIoT](https://twitter.com/sgwirelessIoT)

Information in this document is provided solely to enable authorized users or licensees of SG Wireless products. Do not make printed or electronic copies of this document, or parts of it, without written authority from SG Wireless.

SG Wireless reserves the right to make changes to products and information herein without further notice. SG Wireless makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SG Wireless assume any liability arising out of the application of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. SG Wireless does not convey any license under its patent rights nor the rights of others. SG Wireless products may not be used in life critical equipment, systems or applications where failure of such equipment, system or application would cause bodily injury or death. SG Wireless sells products pursuant to standard Terms and Conditions of Sale which may be found at <https://www.sgwireless.com/page/terms>.

SG Wireless may refer to other SG Wireless documents or third-party products in this document and users are requested to contact SG Wireless or those third parties for appropriate documentation.

SG Wireless™ and the SG and SG Wireless logos are trademarks and service marks of SG Wireless Limited. All other product or service names are the property of their respective owners.

© 2023 SG Wireless Limited. All rights reserved.