


Quick Start EVK-W262U

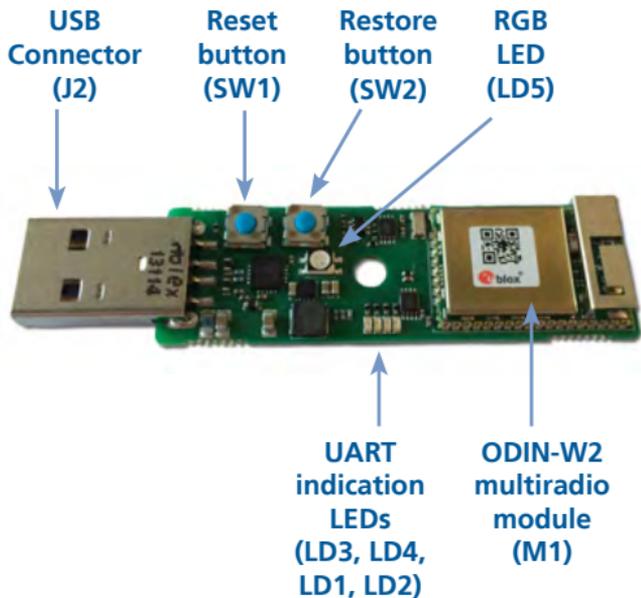

1. Setup

Download the EVK-W262U software (and documentation) from www.u-blox.com/evk-downloads. Click on “Resources to download” and install the software. See notes on back of the card.

1. Insert the EVK-W262U kit into a USB port on your computer.
2. Verify that the FTDI driver is installed successfully. If necessary, download the drivers for the FT231X chipset from www.ftdichip.com.
3. Download the latest firmware to the ODIN-W2 module using s-center evaluation software.

2. Installation

To download the EVK-W262U software package and run the installation:

- An Internet connection is required. Supported Windows operating systems: Vista, 7 and 8.
- Download s-center software.
- Run the s-center exe file and follow the installer instructions.
- When the installation is complete, you will find the s-center menu under the Windows Start button,
All Programs > u-blox
- In the s-center menu, you will find the s-center application, user guide and uninstall options.

3. Troubleshooting

To restore to factory default settings:

Toggle the Reset button (**SW1**) while holding the Restore button (**SW2**) until the RGB LED (**LD5**) turns orange and you are prompted with the welcome message "+STARTUP". This takes approximately 10 seconds.

4. More information

For more information regarding the EVK-W262U, contact your nearest u-blox support:

www.u-blox.com/contact-support