

CHO-MUTE™ 9009

High Frequency Microwave Absorber Material

Parker Chomerics CHO-MUTE 9009

is an elastomer-based absorber material designed to offer a user-friendly approach to the reduction of unwanted electromagnetic radiation from electronic equipment as well as minimize cavity-to-cavity cross coupling and microwave cavity resonances. Comprised of a silicone elastomer matrix with carbon filler material, this material provides RF absorption performance at a high frequency range. CHO-MUTE 9009 is capable of providing 50 dB/cm of absorption within the more broadband frequency range of 10 to 100 GHz. This absorption also applies to 77 GHz, a standard frequency used in the automotive industry. This material is offered as sheet stock of various thicknesses with or without electrically conductive pressure sensitive adhesive. This material is flexible, and can be easily cut and converted for use in empirical testing of absorption solutions.


CHO-MUTE 9009 may be used in close quarters with electronic circuitry to reduce unwanted electromagnetic radiation by absorption of signals and reduction of reflections from metallic surfaces. A wide variety of fabricating techniques are available for custom part manufacturing.

Contact Information

Parker Hannifin Corporation
Chomerics Division
77 Dragon Court
Woburn, MA 01801

Phone: 781 935 4850
Fax: 781 933 4318
chomailbox@parker.com

parker.com/chomerics

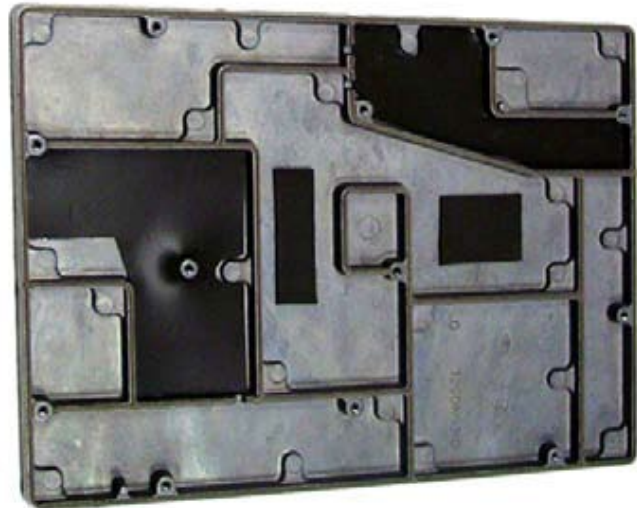

Product Features

- Good absorption at high frequencies 10 to 100 GHz
- Available in molded profiles, sheets, or die-cut/water jet cut shapes (no grit)
- Can be supplied with a pressure sensitive adhesive (PSA)


Typical Applications

- Advanced Driver Awareness Systems (ADAS) at 77GHz
- Automotive
- Military and commercial radars
- Telecommunications equipment
- RF Testing
- Industrial applications

CHO-MUTE 9009 Product Information

| Typical Properties† | | CHO-MUTE 9009 | Test Method |
|---------------------|--|----------------------------|-------------|
| Physical | Elastomer | Silicone | -- |
| | Filler | Carbon | -- |
| | Specific Gravity | 1.21 ± 0.25 | ASTM D792 |
| Electrical | Surface Resistance Initial Ω /square | >1M | CEPS-0002 |
| | Bulk Volume Resistivity Initial Ω ·cm | >1M | CEPS-0002 |
| | Electric Permittivity | 10 | ASTM D2520 |
| | Dielectric Loss Tangent | 0.08 | ASTM D2520 |
| Mechanical | Operating Temperature Range, °C (°F) | -50 to 160 (-58 to 320) | -- |
| | Tensile Strength, psi (MPa) | 932 (6.42) | ASTM D412 |
| | Elongation, % min | 640 | ASTM D412 |
| | Hardness, Shore A | 50 | ASTM D2240 |
| | Tear Strength, lb/in (kN/m) | 112 (19.6) | ASTM D624 |


† Typical properties: these are not to be construed as specifications.

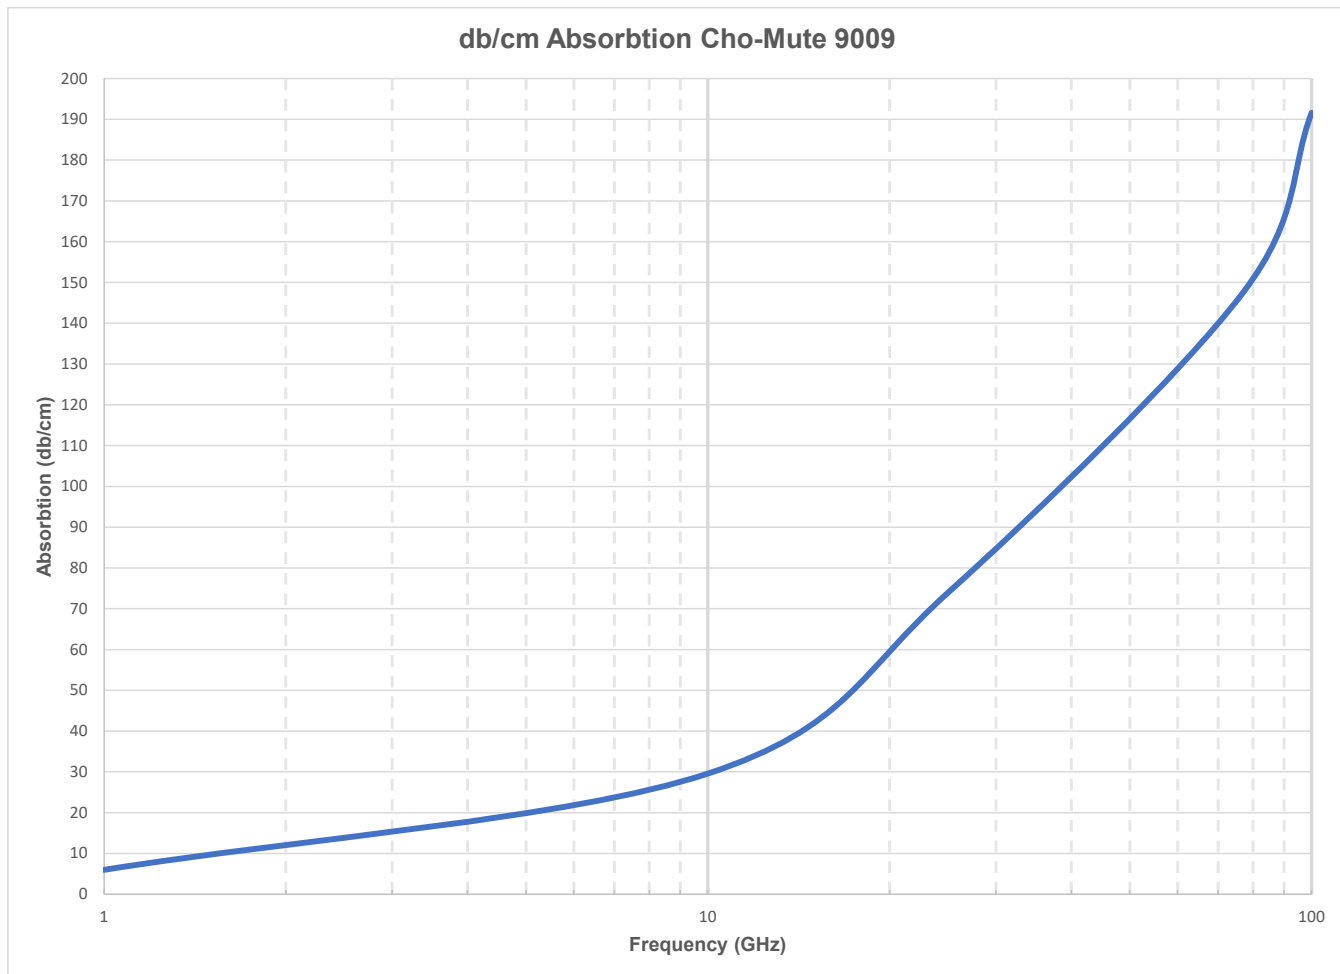

CHO-MUTE 9009 Ordering Information

Part Number: 46-TA-1020-9009

Customer part numbers available upon request.

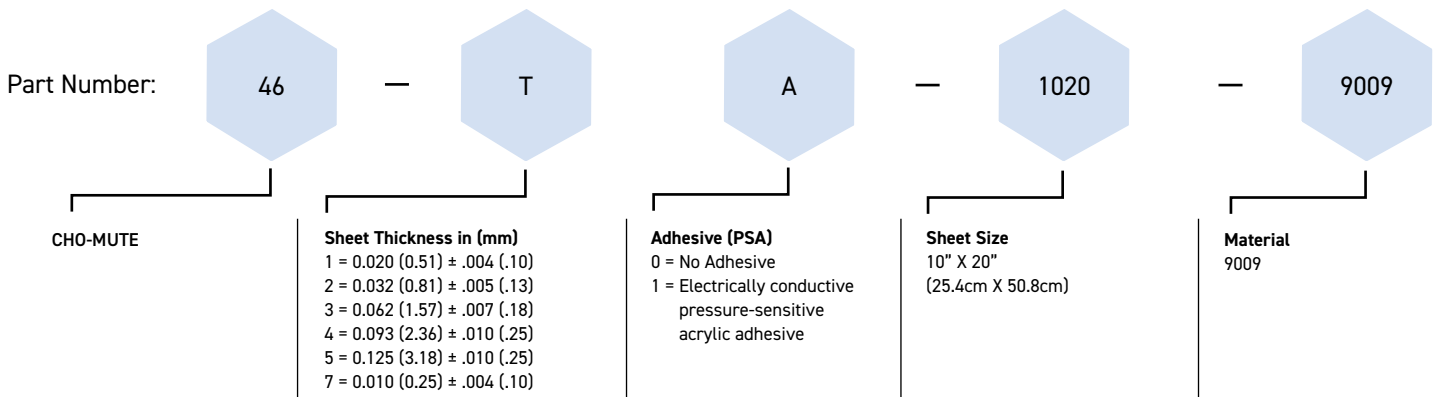

Die-cut part tolerance table is available in the [Conductive Elastomer Engineering Handbook](#) on page 75. Page 75 of the handbook references Table 6-2 and has overall tolerances on flat die-cut gaskets, hole diameter, and thickness. Access it at parker.com/chomerics.

Talk to an Expert about Your Project



Get a Quote

Where to Buy

Request a Free Sample Here

Parker Chomerics

PARKER.COM/CHOMERICS