

SPECIFICATIONS


Accuracy $\pm 3\%$

S.I. MODEL		AMRD1CN	AMRD2CN	AMRD4CN	AMRD8CN	BMRD15CN2	BMRD30CN2
TORQUE RANGE [cN · m]	MIN.~MAX.	0.3~1	0.5~2	1~4	2~8	2~15	4~30
	GRAD.	0.01	0.025	0.05	0.1		0.2
METRIC MODEL		100AMRD	200AMRD	400AMRD	800AMRD	1.5BMRD2	3BMRD2
TORQUE RANGE [gf · cm/kgf · cm]	MIN.~MAX.	gf · cm30~100	50~200	100~400	200~800	kgf · cm0.2~1.5	0.4~3
	GRAD.	gf · cm1	2.5	5	10	kgf · cm0.01	0.02
AMERICAN MODEL		—	AMRD3Z	AMRD6Z	AMRD12Z	1.5BMRD2-A	3BMRD2-A
TORQUE RANGE [ozf · in/lbf · in]	MIN.~MAX.	—	ozf · in 1~3	2~6	3~12	lbf · in0.2~1.5	0.4~3
	GRAD.	—	ozf · in 0.05	0.1	0.2	lbf · in0.005	0.01
APPLICABLE SCREW	SMALL SCREW	—	M1	(M1.1) M1.2	(M1.4) M1.6	(M1.8)	M2 (M2.2)
	TAPPING SCREW	—	—	M1	(M1.1) M1.2	(M1.4) M1.6	(M1.8) M2
DIMENSION [mm]	OVERALL LENGTH	L'	93			116	
	GRIP	D1	10			15	
		D2	8			11	
	BODY	D3	13			15	
		L1	72			62	
		ℓ1	14				
		ℓ2	8			10	
WEIGHT [kg]		0.03			0.05		
ACCESSORY BIT	+	#0					
	-thickness X width	0.15x1, 0.2x1.5, 0.3x2					


Notes

Bits for BMRD are sold separately.

DIMENSIONS

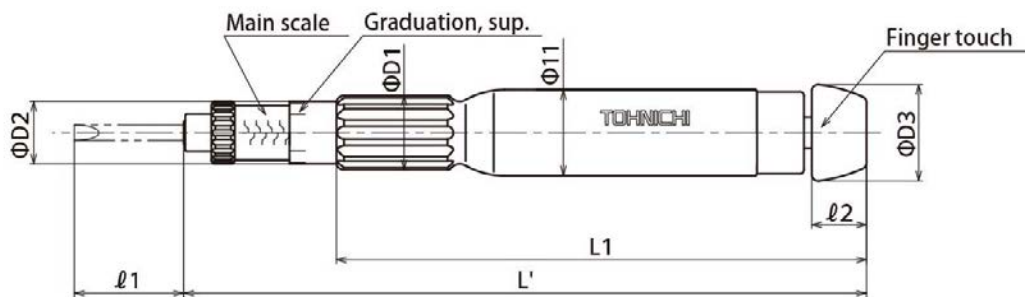

AMRD 1CN~8CN

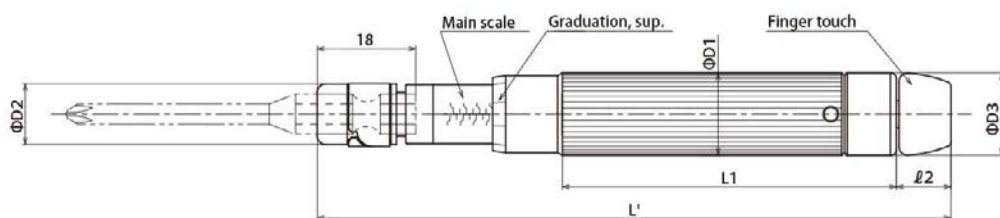

BMRD15CN2, 30CN2