



**REED SWITCH DEVELOPMENTS CORP.**  
 2524 Norwood Court  
 Racine, WI 53403  
 Ph: (262)883-9060  
[sales@reedswitchdevelopments.com](mailto:sales@reedswitchdevelopments.com)


## SPECIFICATION SHEET

**2110-4902-000**

Alternate Part Number:  
**AM2110-4092-00-01**

Active / Equivalent Part Numbers:  
**2110-4902-000 - Magnetic Actuator Only**  
**AM2110-4902-00-01 - Magnetic Actuator Only**

## 2100 Series Magnetic Reed Switch Actuator

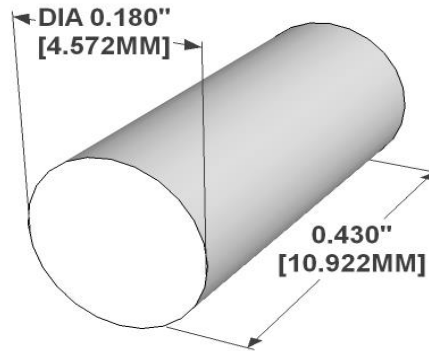

*All measurements are in inches [millimeters]*

Specifications	Description	UM
Shape	Cylindrical Smooth	
Length/Thickness	0.430"/10.92mm	in/mm
Diameter	0.180"/4.57mm	in/mm
Housing Material	Celanex 3316	
Magnetic Orientation	Through Length	
Max Operating Temperature	176°/80°	°F/°C
Curie Temperature	536°/280°	°F/°C
BR max	11	kGauss
BH max	30	MGOe
Coercive Force Hc	10	kOe
Intrinsic Coercive Force Hci	18	kOe

### Assembly Certifications

RoHS / REACH Compliant	Y
Conflict Free Material	Y

REV DATE: 10/06/2021

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

**WBE Certified - State of Wisconsin - MFR CAGE CODE: 32604**

[www.reedswitchdevelopments.com](http://www.reedswitchdevelopments.com)