


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/25/2023	B. Hansen

NOTES:

- MATERIAL:**
INTERNAL JACKET: SILICONE RUBBER
OUTER JACKET: SILICONE RUBBER
CONDUCTOR: BARE COPPER,
STRANDING 7 x 93 x 0.07 mm
- RATING:**
VOLTAGE: 1000 V CAT IV (IEC 61010-031)
CURRENT: 36 A MAX.
TEMPERATURE: -60°C TO +180°C
- AVAILABLE IN 3 STANDARD LENGTHS AND IN 6 DIFFERENT COLORS - REFER TO PART NUMBER TABLE
- RoHS 2 COMPLIANT

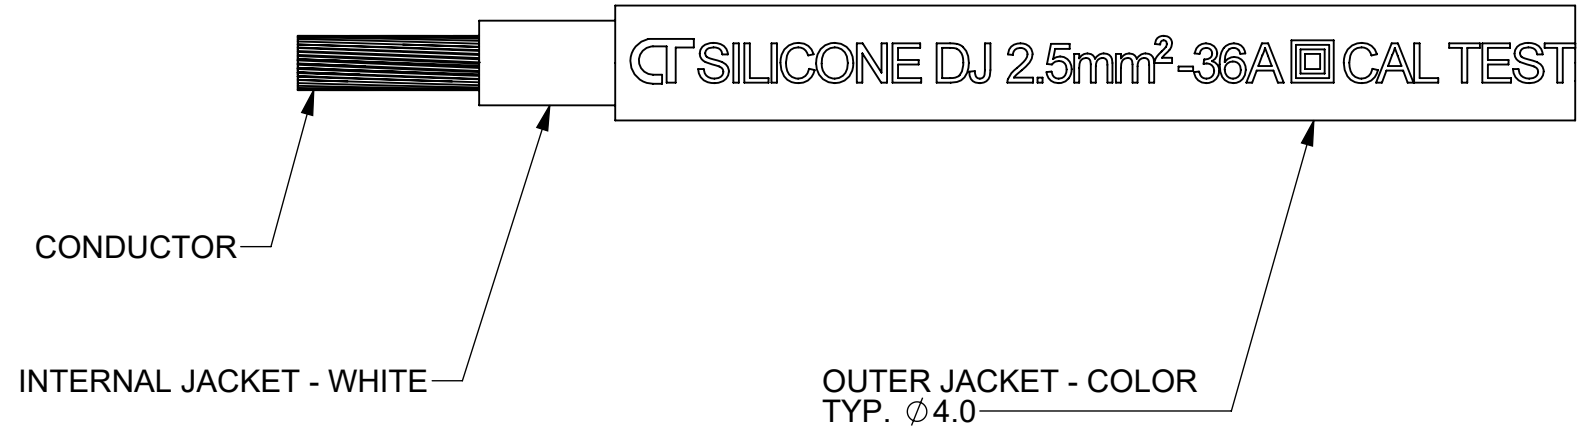

CT2844A-9-XXX	WHITE	10	50	100
CT2844A-6-XXX	BLUE	10	50	100
CT2844A-5-XXX	GREEN	10	50	100
CT2844A-4-XXX	YELLOW	10	50	100
CT2844A-2-XXX	RED	10	50	100
CT2844A-0-XXX	BLACK	10	50	100
PART NUMBER	CONFIGURATION	10m PACKAGE (-XXX)	50m SPOOL (-XXX)	100m SPOOL (-XXX)

PART NUMBER TABLE

THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	PROJECT NO.		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA
		APPROVALS	DATE	
REFERENCE	MATERIAL SEE NOTES	DRAWN GSG	5/24/2023	TEST LEAD WIRE, SILICONE DOUBLE JACKET, 2.5mm², 13 AWG, 36A
	TREATMENT N/A	CHECKER B. HANSEN	5/24/2023	
	FINISH SEE NOTES	ENGR. B. HANSEN	5/24/2023	SIZE B
		DESIGN ACTIVITY		CAGE CODE 43F45
				DWG. NO. CT2844A
				REV. A
				SCALE 2:1
				SHEET 1 OF 1