
# GELWRAP-33/10-250(B12) - ACTIVE

### RAYCHEM | RAYCHEM GelWrap

TE Internal #: CA1421-000 Joints & Splices, EMEA, Cold Applied, ≤ 1 kV, Inline, LV GelWrap, Cross-Section 35 - 240 mm² [#2 - 500 AWG/kcmil], Various LV, RAYCHEM GelWrap

#### View on TE.com >



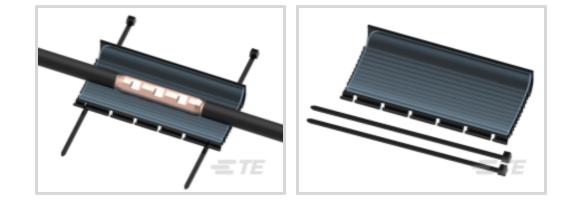

Joints & Splice Product Availability: EMEA Installation Instruction: English Joints & Splice Technology: Cold Applied Joints & Splice Voltage Class: ≤1 kV Joint & Splice Application Type: Inline

# Features

## **Product Type Features**

Cable Seal	Gel
Shelf Life	Unlimited
Filler	PowerGel
Component Design	PowerGel Sealing Gel
Joints & Splice Technology	Cold Applied
Joints & Splice Product Type	LV GelWrap
Cable Shield Style	Various LV
Closing Method	Snap
Product Family	GelWrap
Configuration Features	
Number of Main Wires (Max)	1
Electrical Characteristics	
Joints & Splice Voltage Class	$\leq 1 \text{ kV}$
Body Features	
Flexibility	Semi-Flexible
Color	Black
Dimensions	



**C** For support call +1 800 522 6752

# GELWRAP-33/10-250(B12)

Joints & Splices, EMEA, Cold Applied, ≤ 1 kV, Inline, LV GelWrap, Cross-Section 35 - 240 mm² [#2 - 500 AWG/kcmil], Various LV, RAYCHEM GelWrap



250 mm[10 in] 35 - 240 mm²[#2 - 500 AWG/kcmil] 4 - 18 mm[.157 in] Yes -40 - 90 °C Motor Oil, Hydrochloric Acid, Sodium
4 - 18 mm[.157 in] Yes -40 - 90 °C Motor Oil, Hydrochloric Acid, Sodium
Yes -40 - 90 °C Motor Oil, Hydrochloric Acid, Sodium
-40 - 90 °C Motor Oil, Hydrochloric Acid, Sodium
-40 - 90 °C Motor Oil, Hydrochloric Acid, Sodium
Motor Oil, Hydrochloric Acid, Sodium
-
Yes
Yes
Against Mechanical Impact
Yes
Inline
Yes
ANSI C119.1
EMEA
12
PowerGel-filled wraparound for LV splices and cable jacket repair
English
Compliant
Compliant
No Restricted Materials Above Threshold
Current ECHA Candidate List: JAN 2024 (240)

Joints & Splices, EMEA, Cold Applied, ≤ 1 kV, Inline, LV GelWrap, Cross-Section 35 - 240 mm² [#2 - 500 AWG/kcmil], Various LV, RAYCHEM GelWrap



Candidate List Declared Against: JUN 2016 (169) SVHC > Threshold: Not Yet Reviewed

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**




Also in the Series | RAYCHEM GelWrap

**C** For support call +1 800 522 6752


## GELWRAP-33/10-250(B12)

Joints & Splices, EMEA, Cold Applied, ≤ 1 kV, Inline, LV GelWrap, Cross-Section 35 - 240 mm² [#2 - 500 AWG/kcmil], Various LV, RAYCHEM GelWrap



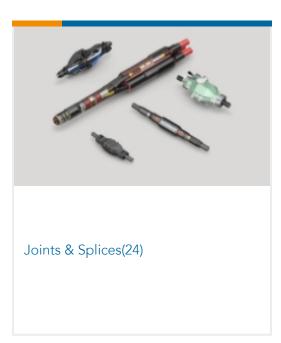

# **Customers Also Bought**

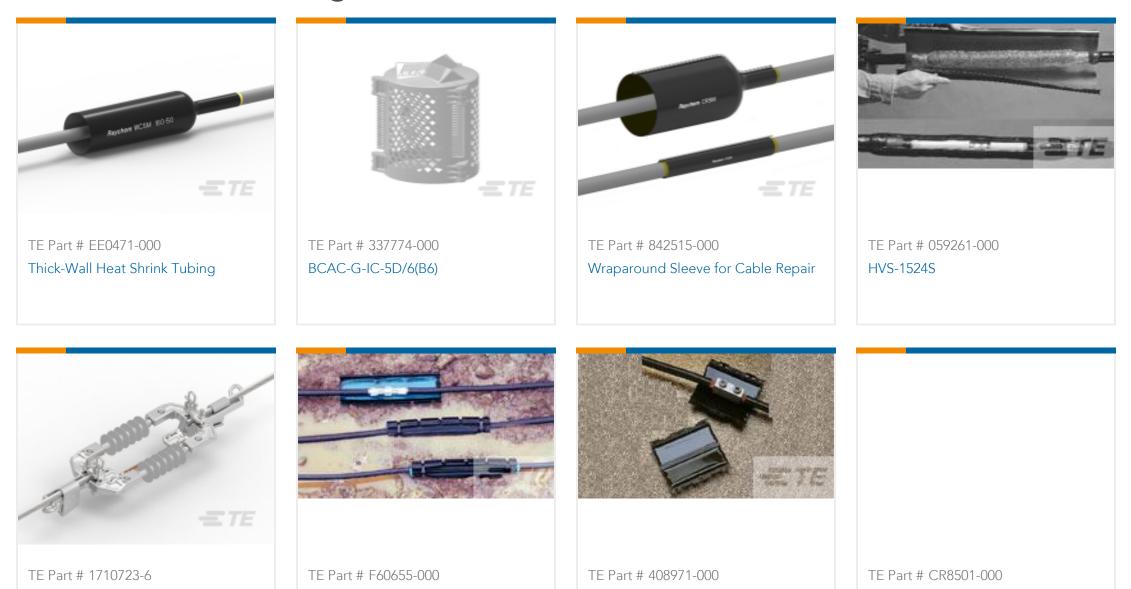

15kILD-KS9C-w/T-556.5	
-----------------------	--

## Documents

Product Drawings GELWRAP-33/10-250(B12)

English

# Datasheets & Catalog Pages GELWRAP-WRAPAROUND-SLEEVE-CABLE-ACCESSORIES

English