

## **NEWNEX PROPRIETARY**


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX


COMPANY NAME	CUSTOMER SIGNATURE	DATE


## **COMMENTS:**

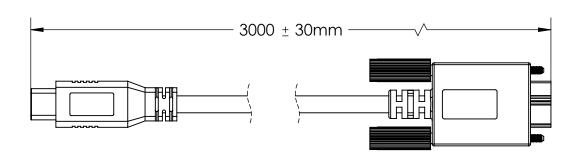










	WIRING STRUCTURE			
	Type C	SIGNAL NAME	Micro B	
	A4,B4,A9,B9	VBUS	1	
Rd=5.1kΩ	A5	C	NC	
	A7	Dn1	2	
	A6	Dp1	3	
	A1,B1,A12,B12	GND+Drain	5,8	
	B10	SDPn1	6	
	B11	SDPp1	7	
	A3	SDPn2	9	
	A2	SDPp2	10	
	SHELL	Shield	SHELL	

WIDING STOLICTUDE

## Notes:

- Cable: USB 3.1 Black PVC Jacket.
- Connector: USB 3.1 Type C Male With Rd. Connector: USB 3.1 Micro B Male Locking
- Packaging: 1 Piece + PE bag.

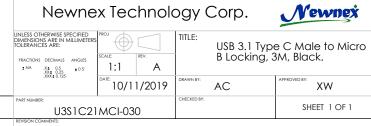

\*100% OPEN, SHORT, MISWIRE TESTING

\*RoHS compliant product

\*Both shell clam and copper foil have 360 degree contact with braiding

Drawing generated