



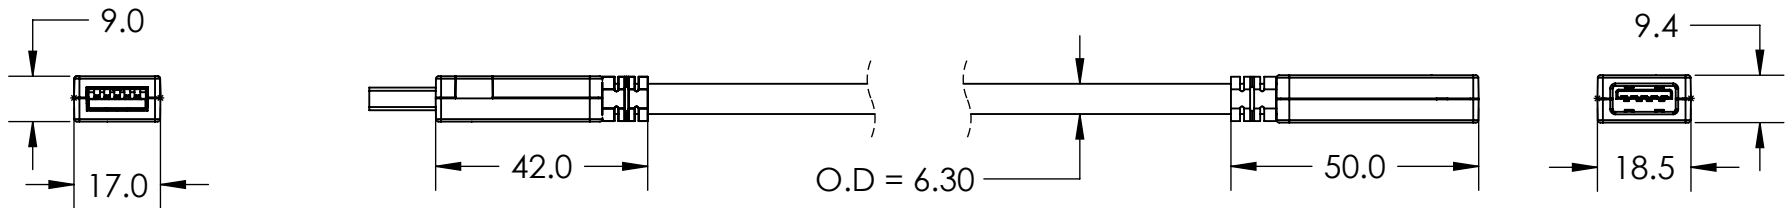

NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

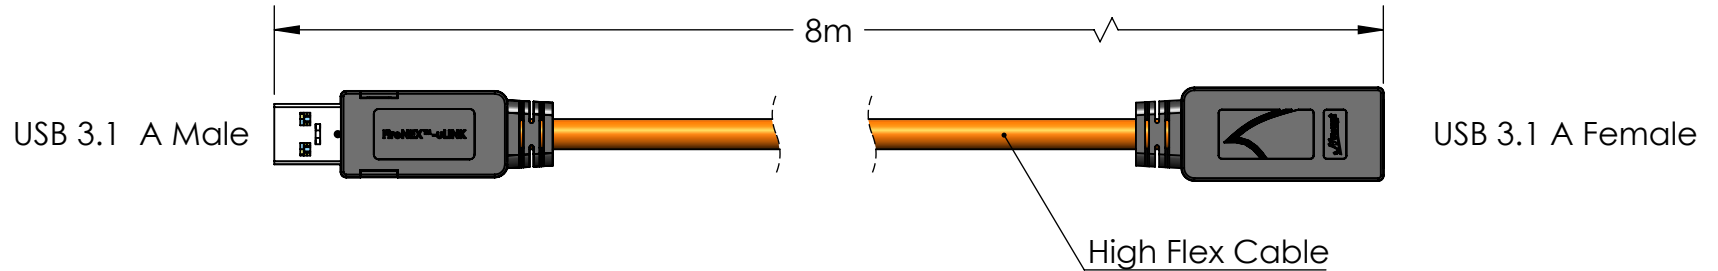

- Recommended Min Bending Radius: 12 x O.D
- Max Drag Chain Travel Distance: 2m
- Rated Flex Life Cycle: 6,000,000

Product: High Flex FireNEX™ - uLINK EX , USB 3.0 Active Repeater Cable, A Male to A Female, 8 Meters, Orange Jacket.

PN: ULHL-EX-8M

9/20/2023