

Micro Contactors: AC & DC Operated


Series K0-04, K0-05 & K0W05



Data according to UL508

Main Contacts (cULus)		Type	K0-05D.. K0W05D01..	K0-04D..	K0-05L..	K0-04L..
Rated operational current "General Use"		A	12	5	9	5
Rated operational power of three motors at 60Hz (3ph)	110-120V	hp	1/2	-	1/2	-
	200-208V	hp	1	-	1	-
	220-240V	hp	1	-	1	-
	277V	hp	1 1/2	-	1 1/2	-
Rated operational power of AC motors at 60Hz (1ph)	110-120V	hp	1/6	-	1/6	-
	200-208V	hp	1/3	-	1/2	-
	220-240V	hp	1/2	-	3/4	-
Fuse / Short-circuit current		A/kA	30/5	-	30/5	-
Rated voltage		VAC	480	480	480	480
Auxiliary Contacts (cULus)						
	heavy pilot duty	AC	B300	B300	B300	B300
	standard pilot duty	DC	R300	R300	R300	R300

Ordering Code Example:

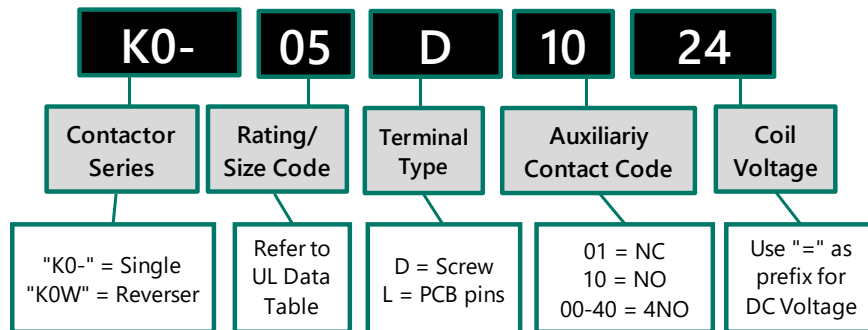

Micro Contactors: AC & DC Operated



Series K0-04, K0-05 & K0W05

Dimensions

AC or DC operated
with screw terminals

K0-04D.. (=)
K0-05D.. (=)



Snap-On Adapter P1039

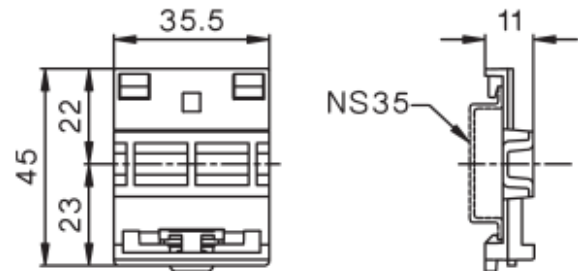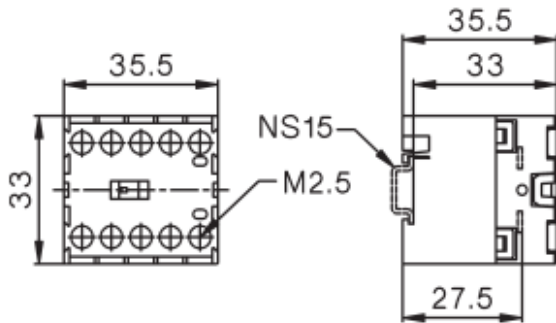

Reversing Contactors
with screw terminals

K0-..D.. with Snap-On Adapter P1039

K0W05D..MS

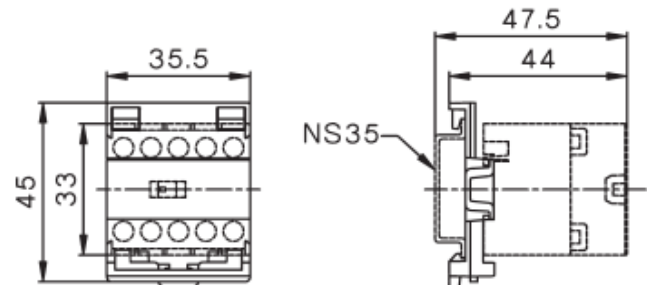
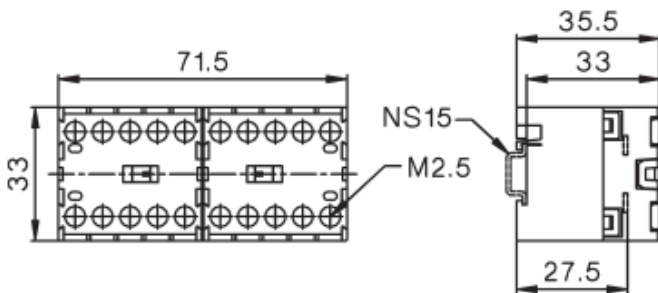


AC or DC operated
with solder connections

K0-04L.. (=)
K0-05L.. (=)

Reversing Contactors
with solder connections

K0W05L..MS

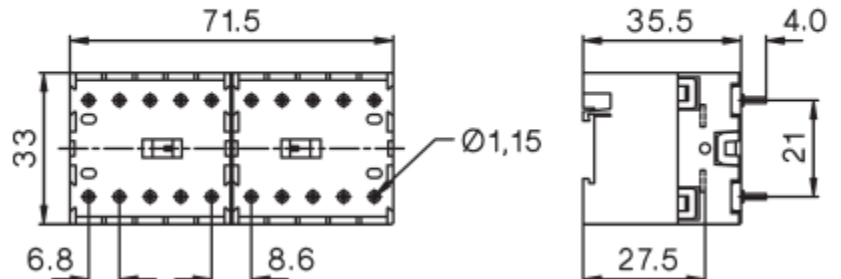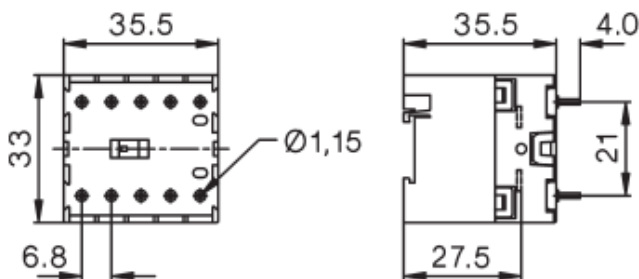

Data subject to change without notice. Please contact B&J-USA, Inc. for current information when making final decisions on the above products.

Micro Contactors: AC & DC Operated

Series K0-04, K0-05 & K0W05

Snap-On Adapter



For Type Specification Type

K0 Snap on Adapter for K0 **P1039**

for snap-on mounting of contactor K0 on 35mm DIN-rail acc. DIN EN 50022


Reversing Starter Connector



For Reversing Starter Types, incl. Coil Connector Type

K0W05D..MS **K0W-VB**

Reversing Starter Connector K0W-VB for reversing contactors K0W05D...

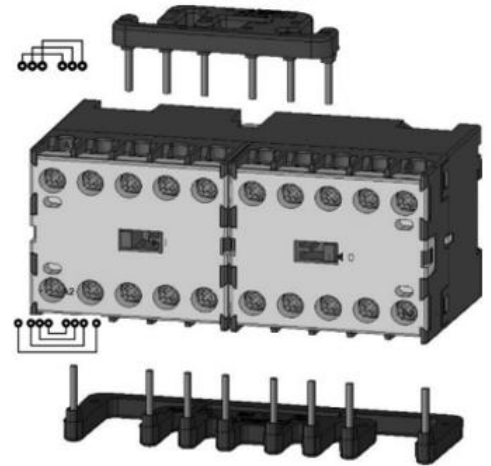

Specifications are subject to change without notice

Important notes!

K0W05...MC Reversing contactors have been updated to K0W05..MS → This is the direct replacement → No technical or dimension changes! Once existing inventory is depleted, only the MS type will be available.

K0W reversing contactors come as 2 contactors on one molded base – you cannot order one side only! Please look for the part number on the left hand side contactor: **K0W05..M..** The coil voltage can be found on the bottom of the contactor:

