


P1,P2: M-Y139C
 M-139G
 P3: M-426E

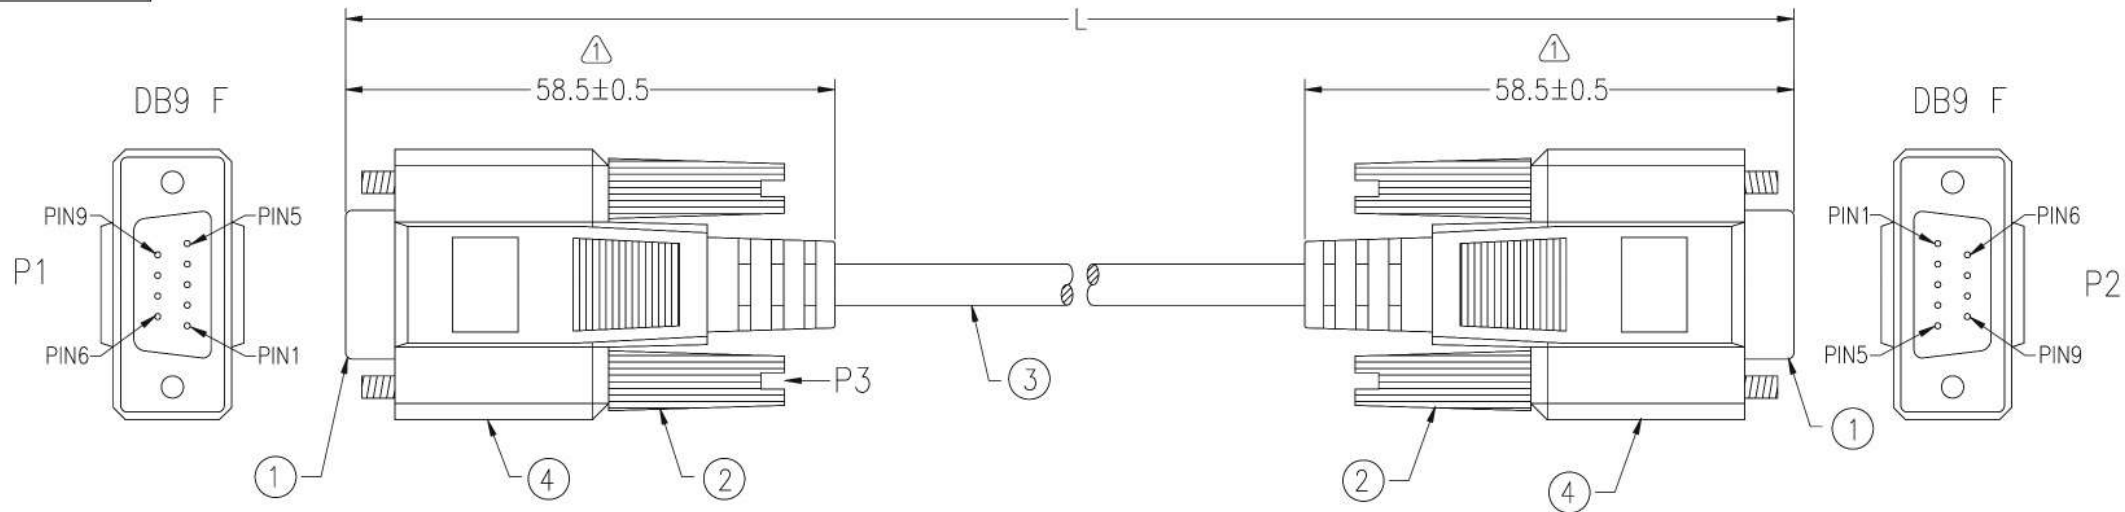

1067			
P1	P2		⚠
1	4	BROWN	
6			
2	3	RED	
3	2	ORANGE	
4	1	YELLOW	
	6		
5	5	GREEN	
7	8	BLUE	
8	7	BLACK	
SHIELD	SHIELD		

⚠ *NOTE: All relevant materials are complied with RoHS directive .

4	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	2	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	NON-UL 7C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2807C-041	H5BL24-0304B01	L-20mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	2	M277
No.	DESCRIPTION	Q'TY		Supplier

APPROVED		<p>COMPUCABLEPLUS PROVIDING CONNECTIVITY SOLUTIONS</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$	
CHECKED	HU			
DRAWING	ZHU			
DATE	05/JULY/19			
ITEM NO.	DNC-9FF-XXB & DNC-9FF-XXB-MF		UNIT:mm	